



**DEFENSE LOGISTICS AGENCY
LAND AND MARITIME
P.O. BOX 3990
COLUMBUS, OHIO 43218-3990**

October 8, 2025

MEMORANDUM FOR MILITARY/INDUSTRY DISTRIBUTION

SUBJECT: Initial Draft of: MS70109B, MS51926C
Project Number: 5340-2025-027, 5340-2025-028

The initial drafts for these subject documents, are now available for viewing and downloading from the DLA Land and Maritime-VA Web site:

<https://landandmaritimeapps.dla.mil/programs/milspec/default.aspx>

Major changes to these documents involves modernization. These documents were last updated in 1969.

Concurrence or comments are required at this Center within 30 days from the date of this letter. Late comments will be held for the next coordination of the document. Comments from military departments must be identified as either "Essential" or "Suggested". Essential comments must be justified with supporting data. Military review activities should forward comments to their custodians of this office, as applicable, in sufficient time to allow for consolidating the department reply. Lack of response to this draft will be construed as concurrence.

If these documents are of interest to you, please provide your comments or suggested changes. The point of contact for this document is Mr. Ahmad, phone number 614-693-0661, e-mail Haseeb.Ahmad@dlam.mil, or may be mailed via the US Postal Service to DLA LAND AND MARITIME, ATTN: VAI (Attention: Haseeb Ahmad), P.O. Box 3990, Columbus, OH 43218-3990.

Sincerely,

/SIGNED/

ERIC J. CANDELARIA
Acting Chief,
Interconnection Branch

Note: This draft, dated 8 October 2025 and prepared by DLA-CC, has not been approved and is subject to modification. **DO NOT USE PRIOR TO APPROVAL.** (Project 5340-2025-028).

INCH-POUND

MS51926C
DRAFT
SUPERSEDING
MS51926B
29 May 1969

DETAIL SPECIFICATION SHEET

CLIP, END STRAP TYPE I, CLASS 1 AND CLASS 2

Inactive for new design after 30 November 1999.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and specification MIL-DTL-496.

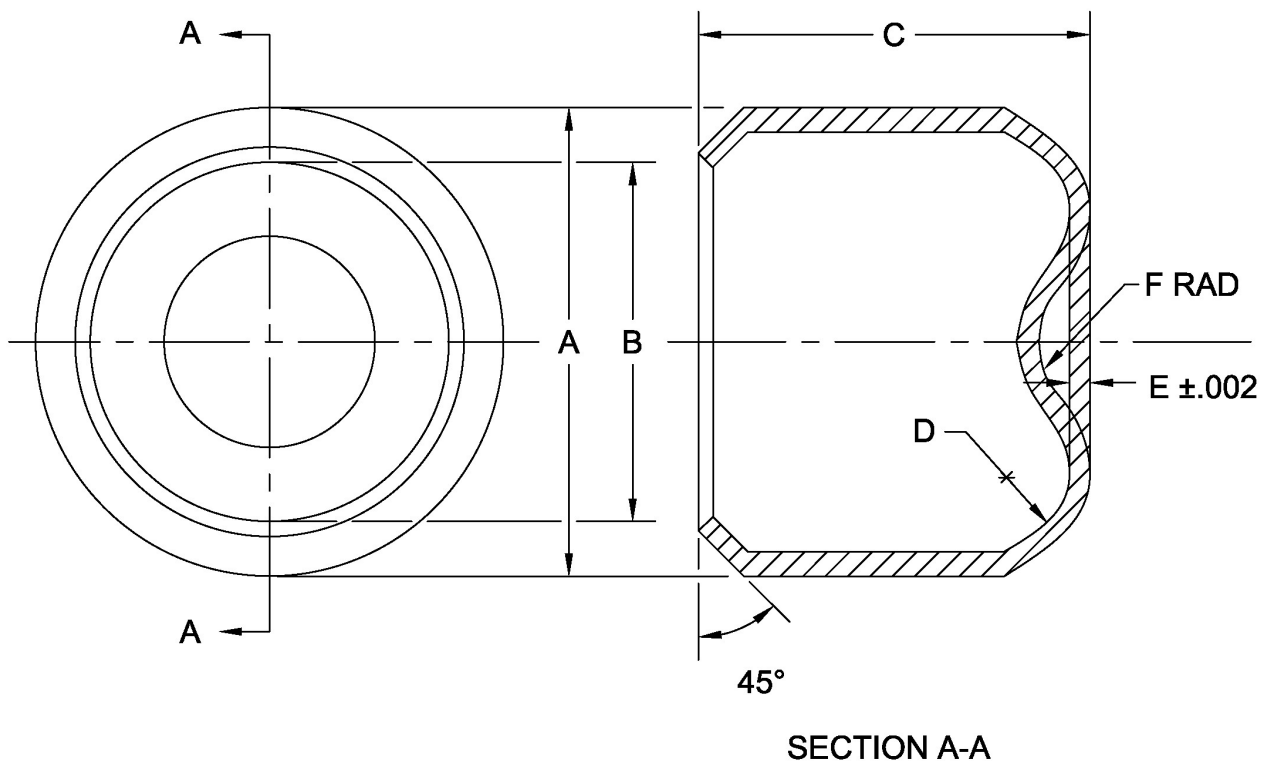


FIGURE I. Clip.

AMSC N/A

DISTRIBUTION STATEMENT A: Approved for public release; Distribution is unlimited.

FSC 5340



MS51926C
DRAFT DATED 8 October 2025

TABLE I. Dash number and dimensions.

Dash Number		Strap Width	A	B	C	D			F
Brass	Steel						Brass	Steel	
-1	-6	5/8	0.450	0.340	0.500	0.125	0.0253	0.022 Sheet 0.0239 Strip	-
-2	-7	3/4	0.560	0.470	0.600	0.150	0.0253	0.022 Sheet 0.0239 Strip	-
-3	-8	1	0.680	0.562	0.600	0.175	0.0253	0.022 Sheet 0.0239 Strip	0.500
-4	-9	1-1/4	0.850	0.680	0.750	0.175	0.0253	0.022 Sheet 0.0239 Strip	0.625
-5	-	1-1/2	1.021	0.880	0.830	0.300	0.0253	-	1.062


REQUIREMENTS:

Material. In accordance with procurement specification.

Finish. In accordance with procurement specification.

Tolerances. Decimals ± 0.015 ; degrees $\pm 5^\circ$ except where otherwise noted.

Part or identifying Number (PIN). The part number consists of the basic MS Sheet number followed by dash number taken from Table I.

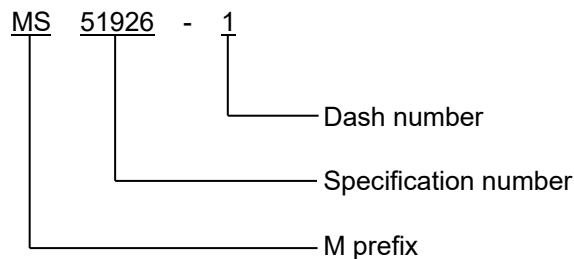

MS51926-1 designates a brass clip for a 5/8-inch strap width.

NOTES:

1. Dimensions are in inches.
2. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
3. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

Reference documents. This document references the following:

MIL-DTL-496

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:

Army - GL
Navy - YD
Air Force – 99
DLA - CC

Review activities:

Army – AV, CR4, MD, MI

Preparing Activity:

DLA – CC

(Project 5340-2025-028)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.