



DEFENSE LOGISTICS AGENCY
LAND AND MARITIME
P.O. BOX 3990
COLUMBUS, OHIO 43218-3990

March 27, 2017

MEMORANDUM FOR MILITARY/INDUSTRY DISTRIBUTION

SUBJECT: Initial Draft of MIL-PRF-27/318C Amendment 1, MIL-PRF-27/319C Amendment 1, MIL-PRF-27/320C Amendment 1, MIL-PRF-27/321C Amendment 1, MIL-PRF-27/322E Amendment 1, MIL-PRF-27/323C Amendment 1, MIL-PRF-27/326C Amendment 1, MIL-PRF-27/328C Amendment 1; Project Numbers 5950-2017-020, -021, -022, -023, -024, -025, -026, -027.

The proposed initial drafts are being amended to add a dimension table to Figure 1 instead of dimensions on the figures. This change will help to expedite further document actions.

The initial draft for the subject documents, dated 27 March 2017, are now available for viewing and downloading from the DLA Land and Maritime-VA Web site:

<http://www.landandmaritimeapps.dla.mil/Programs/MilSpec/initialdrafts.aspx>

Concurrence or comments are required at this Center within 30 days from the date of this letter. Late comments will be held for the next coordination of the document. Any further coordination concerning these documents will be circulated only to firms and organizations that furnish comments or reply that they have an interest. Comments from military departments must be identified as either "Essential" or "Suggested". Essential comments must be justified with supporting data. Military review activities should forward comments to their custodians of this office, as applicable, in sufficient time to allow for consolidating the department reply

The point of contact for this document is Mr. Ken Beymer, DLA Land and Maritime, VAT, Post Office Box 3990, Columbus, OH 43218-3990. Mr. Beymer can also be reached at 614-692-0557/850-0557, or by facsimile 614-692-6939/850-6939, or by e-mail to: ken.beymer@dla.mil

/SIGNATURE ON FILE/

MICHAEL A. RADECKI
Chief
Electronics Component Team

NOTE: This draft dated, 27 March 2017, prepared by DLA-CC has not been approved and is subject to modification.
DO NOT USE FOR ACQUISITION PURPOSES.

MIL-PRF-27/323C
 AMENDMENT 1
DRAFT
 SUPERSEDING
 MIL-PRF-27/323C
 25 July 2008

PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, TELEPHONE INTERCONNECT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of specification MIL-PRF-27.

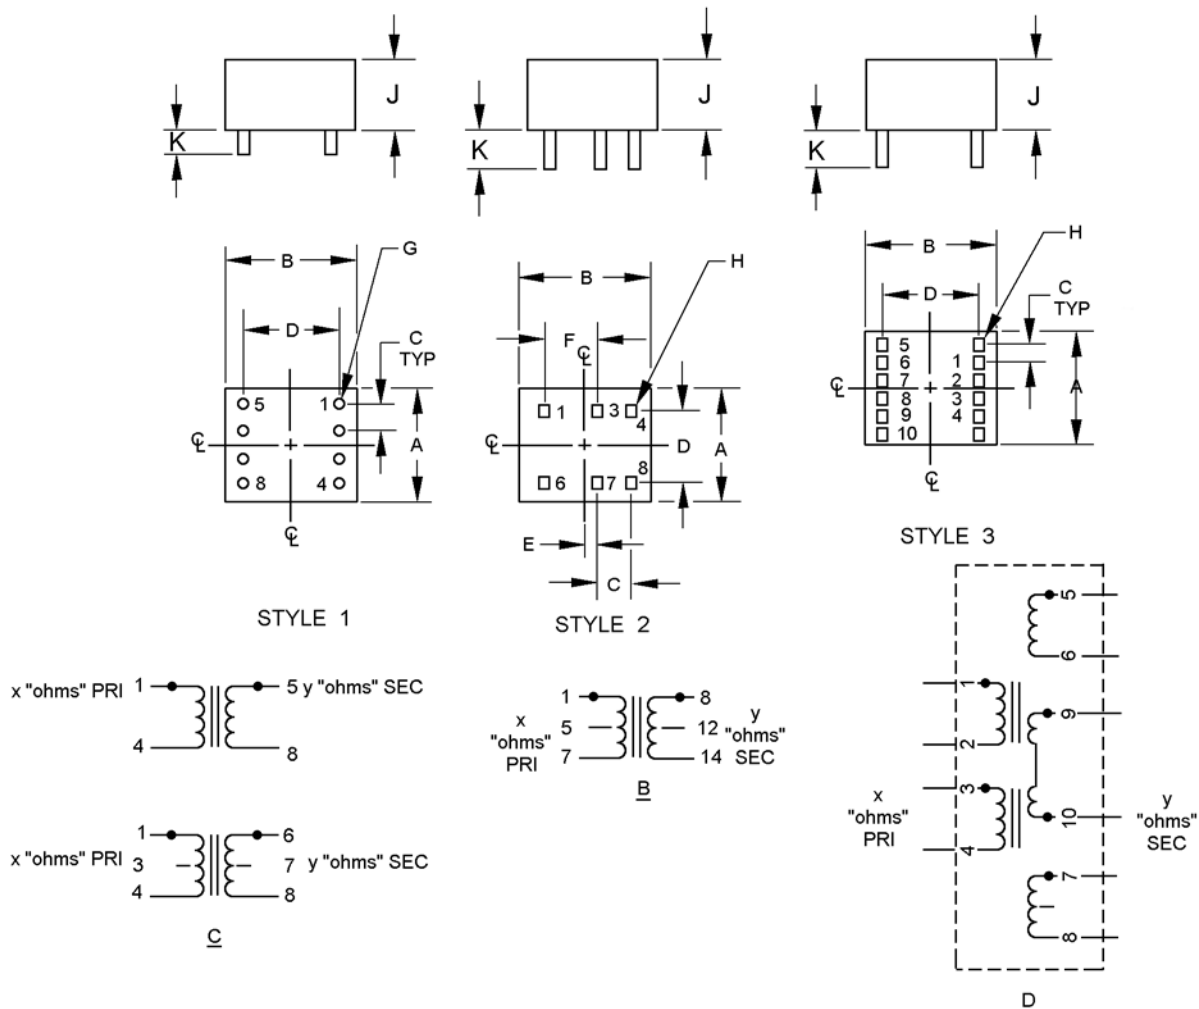


FIGURE 1. Dimensions and configurations.



MIL-PRF-27/323C
W/AMENDMENT 1

Dash no.	A max.	B max.	J max.	C $\pm .010$	D $\pm .010$	E $\pm .010$	F $\pm .010$	G, Dia $\pm .005$	H, Sq. $\pm .005$	K, Pin Ht.	Weight oz. Max	Style
01	.875	1.093	.719	.20	.50	.13	----	.025	----	.125	1.2	1
02	1.562	1.875	.750	.25	1.00	.375	.75	----	.025	.156	3.7	2
03	1.562	1.875	1.156	.40	1.00	.20	.80	----	.025	.343	9.0	2
04	1.562	1.875	1.156	.40	1.00	.20	.80	----	.025	.343	9.0	2
05	1.562	2.812	1.156	.20	2.30	----	----	----	.025	.125	12.5	3

Inches	mm	Inches	mm
.025	0.64	.75	19.1
.12	3.2	.80	20.3
.15	3.8	.875	22.23
.156	3.96	1.00	25.4
.20	5.1	1.093	27.76
.25	6.4	1.156	29.36
.343	8.71	1.562	39.67
.375	9.53	1.625	41.28
.40	10.2	1.875	47.63
.50	12.7	2.812	71.42
.719	18.26		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the top of the case. Primary and secondary electrical values shall be marked as specified in table I.
4. For dash numbers 03 and 04, mark terminals as follows:




FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Power level: See table I.

Working voltage: 535 V maximum, all windings.

Frequency range: 300 Hz to 4,000 Hz.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals: Printed circuit pins, solderable.

Height: See figure 1.

Weight: See figure 1.

Operating temperature range: -55°C to +105°C.

Altitude: 10,000 feet, maximum.

| Terminal strength: MIL-STD-202-211, test condition A, 2.0 pounds.

| Dielectric withstanding voltage: MIL-STD-202-301.

Test voltage: 1,500 volts rms.

Electrical characteristics:

Frequency response: At rated source and load impedances (see table I), with maximum power output (see table I) over frequency range of 300 Hz to 4,000 Hz, the response shall be within the limits specified in table I. Reference frequency shall be 1 kHz.

Insertion loss: At specified power level (see table I) at 1 kHz, the insertion loss shall not exceed 1.2 dB.

Harmonic distortion: Total harmonic content of the output shall not exceed 0.5 percent at the specified power level (see table I) and primary dc current (see table I).
across (3-5) shall be as specified in table I.

TABLE I. Electrical ratings.

Dash no.	Circuit Diagram	Primary impedance (ohms)	Primary DCR $\pm 25\%$ (ohms)	Maximum unbalanced dc current (mA)	Secondary impedance (ohms)	Secondary DCR $\pm 25\%$ (ohms)	Maximum output power (mW)	Return loss min. (dB)	Frequency response (dB)
01	A	600	33	0	600	35	5	25	$\pm .50$
02	C	600 CT	44	70	600 CT	51	10	10	$\pm .70$
03	B	600 CT	32	100	600 CT	21	10	10	$\pm .75$
04	B	600 CT	22	120	600 CT	21	10	10	$\pm .75$
05	D	600 Split	48 (1-2) 43 (3-4)	100	600/600	52 (5-6) 52 (7-8) 91 (9-10)	10	11	$\pm .50$

Return loss: When measured in accordance with MIL-STD-188-200 over the frequency range of 300 Hz to 4,000 Hz, the return loss shall be as specified in table I.

Longitudinal balance: When measured in accordance with FCC68.310 over the frequency range of 300 Hz to 4,000 Hz, the longitudinal balance shall be 60 dB minimum.

Transhybrid loss (dash no. 05 only): When tested in accordance with figure 2, the transhybrid loss shall be 60 dB minimum.

No load (center-tap voltage unbalance) (applicable to circuit diagrams B and C): 1 percent maximum at 1 kHz with the specified dc current flowing in the primary with the following primary voltage applied:

Dash no.	Primary voltage (volts)
02	2.4
03	2.4
04	3.0

Polarity: Shall be additive with the following terminals connected:

Dash no.	Polarity additive with the following terminals connected
01	4 and 5
02	4 and 6
03, 04	7 and 8
05	2 and 3, 4 and 5 6 and 9, 10 and 7

Marking location: See figure 1.

Part or Identification Number (PIN): M27/323-(dash number from table I and figure 1).

VERIFICATION:

Qualification inspection: Transhybrid loss, return loss, and longitudinal balance tests shall be performed as part of the electrical characteristics tests for group II inspections.

Quality conformance inspection: Transhybrid loss, return loss, and longitudinal balance tests shall be performed as part of the electrical characteristics tests for group B, subgroup II inspection.

Extent of Qualification:

Qualification testing and approval to M27/323-02 shall be sufficient to grant qualification approval to M27/323-01 through M27/323-05.




FIGURE 2. Test circuit for transhybrid loss.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202-211
MIL-STD-202-301
MIL-STD-188-200
FCC68.310

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:

Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5950-2017-025)

Review activities:

Army – AR, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.dla.mil>.