

COMMERCIAL ITEM DESCRIPTION

COIL, RF, CHIP, FIXED, POWER, MAGNETICALLY SHIELDED,
SURFACE MOUNT

Inactive for new design after (December 1, 2025).

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a radio frequency coil. Coils covered by this CID are intended for commercial/industrial applications.
2. Part or Identifying Number (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

<u>AA59235</u>	<u>-</u>	<u>001</u>		<u>S</u>
CID number		Dash number (see table I)		Termination finish (see table II)


3. SALIENT CHARACTERISTICS.

- 3.1 Interface and physical dimensions. Coils supplied to this CID shall be as specified herein. (see figure 1).
- 3.2. Electrical characteristics. The electrical characteristics shall be as specified in table I.
- 3.3 Weight. The weight shall be no greater than 0.5 gram maximum.
- 3.4 Operating temperature range. The operating temperature range is -40°C to +85°C.
- 3.5 Temperature rise. DC current rating for a 15°C rise.
- 3.6 Altitude. The maximum altitude is 70,000 feet.
- 3.7 Marking. Inductors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: DLA Weapons Support, Columbus, ATTN: VAT, P.O. Box 3990, Columbus OH 43218-3990, or email (transformers@dla.mil). Since contact information can change, please verify the currency of the address information using the ASSIST Online database at <https://assist.dla.mil>.



- 3.8 Pure tin. The use of pure tin, as an underplate or final finish is prohibited both internally and externally. Tin content of transformer components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass.
- 3.9 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.
- 3.10 Workmanship. Inductors shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

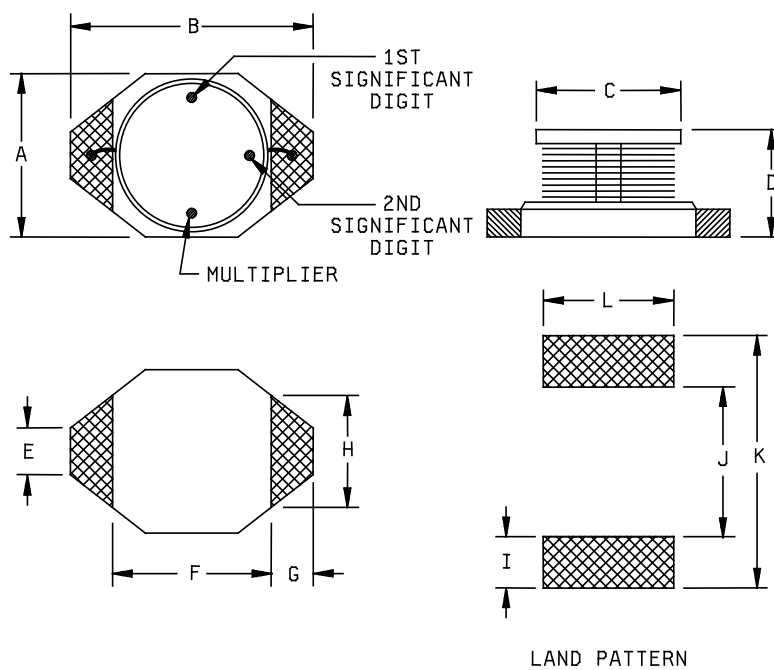

Dimension	Inches	mm	Dimension	Inches	mm
A	.175 Max	4.45 Max	G	.040	1.02
B	.260 Max	6.60 Max	H	.120	3.05
C	.160 Dia	4.06 Dia	I	.055	1.40
D	.115 Max	2.92 Max	J	.160	4.06
E	.050	1.27	K	.270	6.86
F	.170	4.32	L	.140	3.56

NOTES:

1. Dimensions are in Inches.
2. Metric equivalents (in parenthesis) are listed for general information only.

FIGURE 1. Configuration and dimensions.

TABLE I. Electrical characteristics.

CID dash number AA59235-	L $\pm 20\%$ (μH)	DCR Max (Ohms)	SRF typ (MHz)
001	1.0	.065	180
002	1.5	.070	120
003	2.2	.075	100
004	3.3	.080	70
005	4.7	.085	60
006	6.8	.090	50
007	10	.125	45
008	15	.135	35
009	22	.160	25
010	33	.275	20
011	47	.300	17
012	68	.575	14
013	100	1.10	12
014	150	1.40	7
015	220	2.25	7
016	330	2.90	6
017	470	3.60	4
018	680	4.55	3.5
019	1000	8.10	2.5

TABLE II. Termination finish.

Code	Termination finish
L	Gold over nickel over moly-manganese
T	RoHS, tin-silver-copper (95.5/4/0.5)
S	Non-RoHS tin-lead (63/37)

4. **REGULATORY REQUIREMENTS.** The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 **Product conformance.** The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 **Market acceptance.** The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

- a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.
- b. The company must have sold 1,000 units meeting the requirements of this CID in the commercial marketplace over the past 2 years.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products in accordance with the requirements listed in this CID. See section 2 for PIN format example.

7.2 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible to meet the requirements of this specification. As of the dating of this document, the U.S. Environmental Protection Agency (EPA) is focusing efforts on reducing 31 priority chemicals. The list of chemicals is available on their website at <http://www.epa.gov/epaoswer/hazwaste/minimize/chemlist.htm>. Further information is available at the following EPA site: <http://www.epa.gov/epaoswer/hazwaste/minimize/>. Included in the EPA list of 31 priority chemicals are cadmium, lead, and mercury. Use of the materials on the list should be minimized or eliminated unless needed to meet the requirements specified herein (see Section 3).

7.3 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these inductors to DLA under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.4 Source of documents.

FEDERAL REGULATIONS

FAR - Federal Acquisition Regulations (FAR)

(Copies of these documents are available online at www.acquisition.gov/comp/far/index.html or from the U.S. Government Printing Office, 732 North Capital Street, NW, Washington D.C. 20401.)

INDUSTRY STANDARDS

ASTM B545 - ASTM International

(Copies of this document are available online at <https://www.astm.org/> or from ASTM Headquarters, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959, USA.)

7.5 Tin whisker growth. The use of alloys with tin content greater than 97 percent, by mass, may exhibit tin whisker growth problems after manufacture. Tin whiskers may occur anytime from a day to years after manufacture and can develop under typical operating conditions, on products that use such materials. Conformal coatings applied over top of a whisker-prone surface will not prevent the formation of tin whiskers. Alloys of 3 percent lead, by mass, have shown to inhibit the growth of tin whiskers. For additional information on this matter, refer to [ASTM-B545](#) (Standard Specification for Electrodeposited Coatings of Tin).

7.6 Ordering data. The contract or order should specify the following:

- a. CID document number, revision, and CID PIN.
- b. Product conformance provisions.
- c. Packaging requirements.
- d. All military parts shall be ordered with termination finish of code "S".

7.7 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

<u>MFR's CAGE</u>	<u>MFR's name and address</u>
02113	Coilcraft Inc 1102 Silver Lake Road Cary, Illinois 60013-1658 Phone number (847) 639-2361 Website (URL): www.coilcraft.com

7.8 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/Ns as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE III. P/N supersession data.

CID dash number (see table I) AA59235-	Vendor commercial PIN CAGE 02113 <u>1/</u>
001*	DT1608C-102ML*
002*	DT1608C-152ML*
003*	DT1608C-222ML*
004*	DT1608C-332ML*
005*	DT1608C-472ML*
006*	DT1608C-682ML*
007*	DT1608C-103ML*
008*	DT1608C-153ML*
009*	DT1608C-223ML*
010*	DT1608C-333ML*
011*	DT1608C-473ML*
012*	DT1608C-683ML*
013*	DT1608C-104ML*
014*	DT1608C-154ML*
015*	DT1608C-224ML*
016*	DT1608C-334ML*
017*	DT1608C-474ML*
018*	DT1608C-684ML*

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID.

At the time of preparation of this CID, the commercial products were reviewed and could be replaced by the CID PIN shown.

* Asterisk represents the TABLE II - Termination finish code.

7.9 Government users. Procurement information can be found by contacting DLA Weapons Support, ATTN: DLA Weapons Support - FMTE, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-7727.

7.10 Changes from previous issue. The margins of this CID are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:
DLA - CC

Project (5950-2026-004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/>.