

INCH-POUND

MIL-DTL-15743/18C

27 August 2018

SUPERSEDING

MIL-DTL-15743/18B

12 March 2007

DETAIL SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION,
SIX-POLE, TWO-POSITION, POSITIVE DETENT, 125 VOLTS ALTERNATING CURRENT,
10 AMPERE, SYMBOL 2639.1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch described herein shall consist of this specification and MIL-DTL-15743.

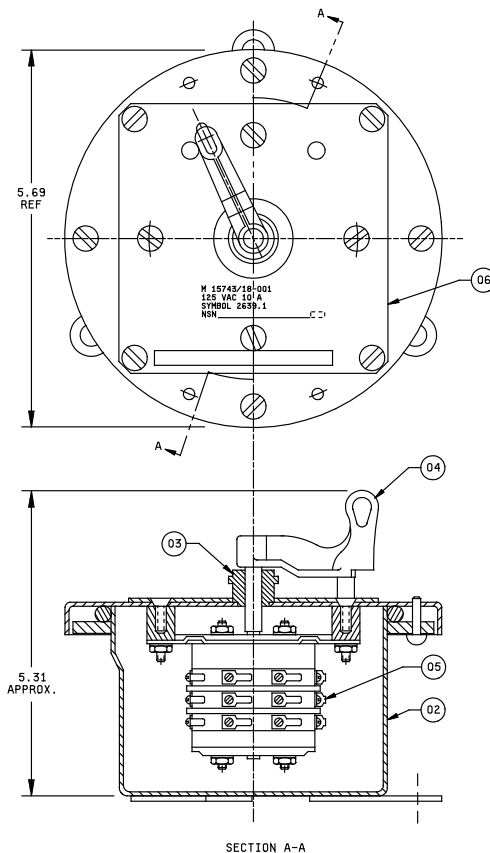


FIGURE 1. Switch, enclosed. 01

NOTES:

1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
 - Two place decimals - plus or minus 0.02.
 - Three place decimals - plus or minus 0.005.
 - Angular dimensions - plus or minus 30 minutes.

AMSC N/A

FSC 5930



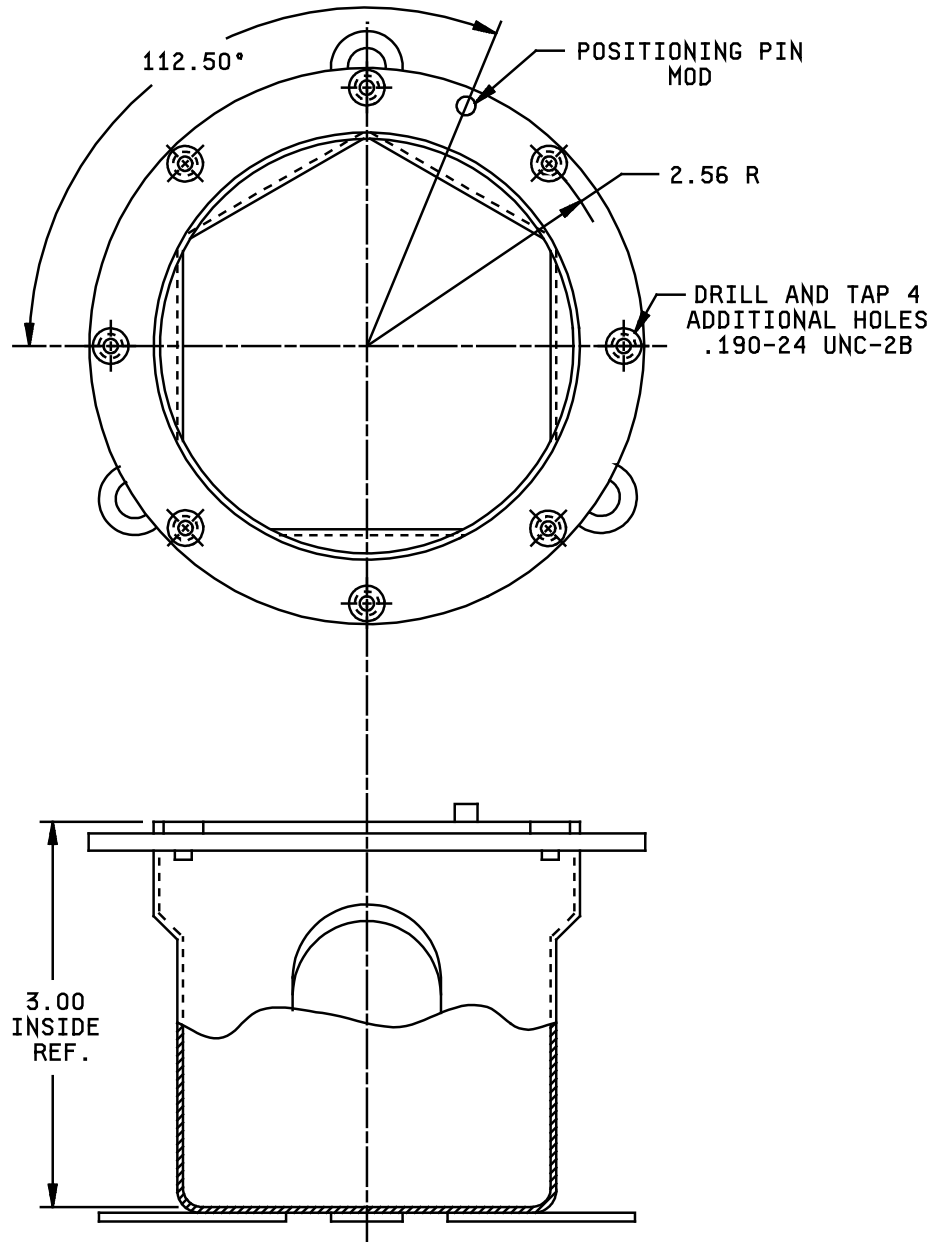


FIGURE 2. Box assembly, (modified).

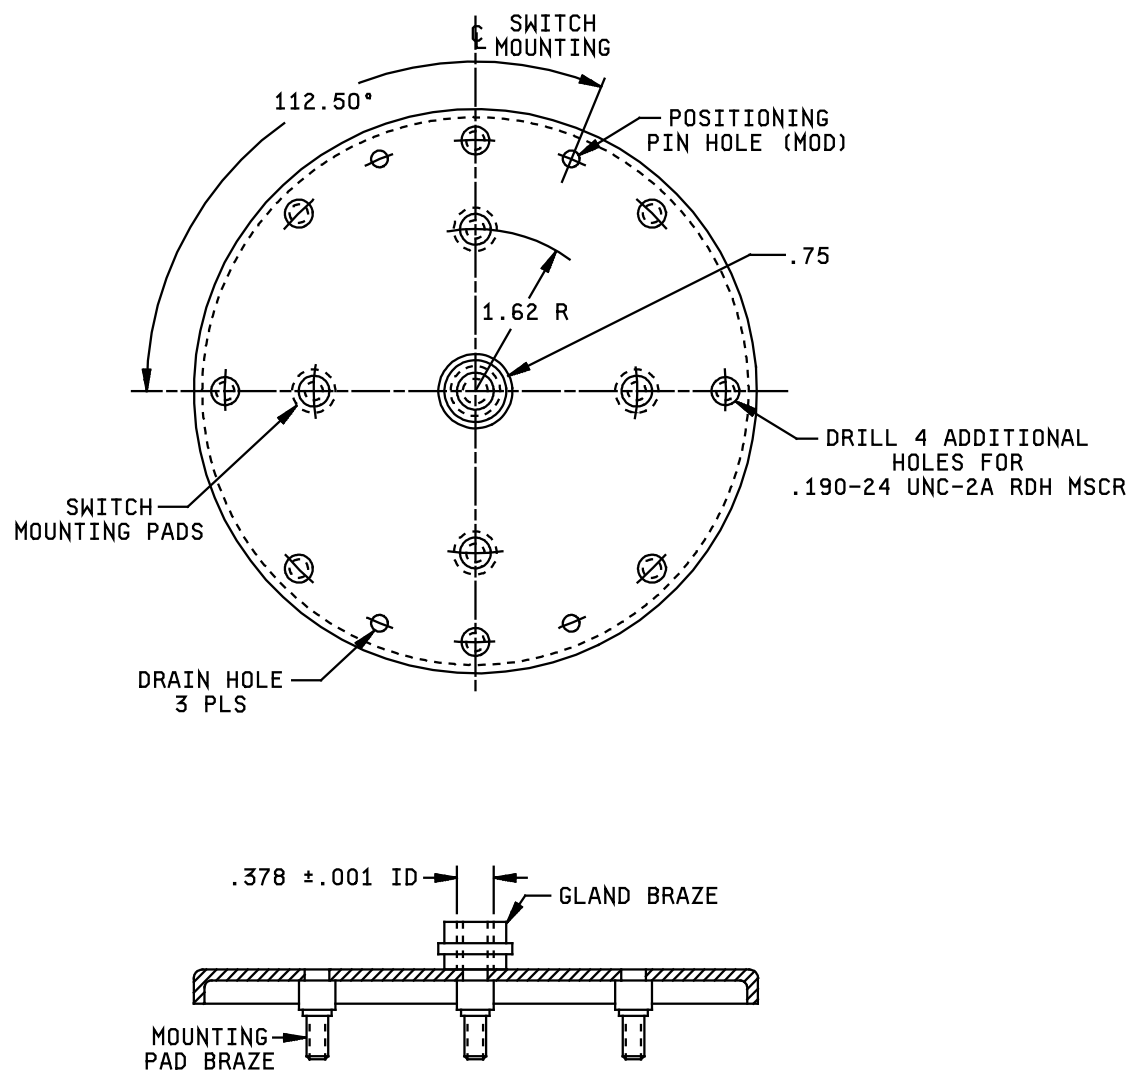
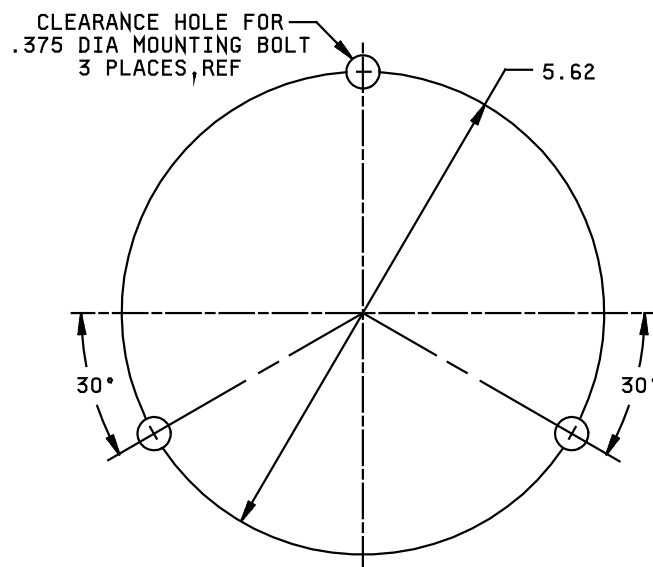


FIGURE 3. Cover assembly, (modified).



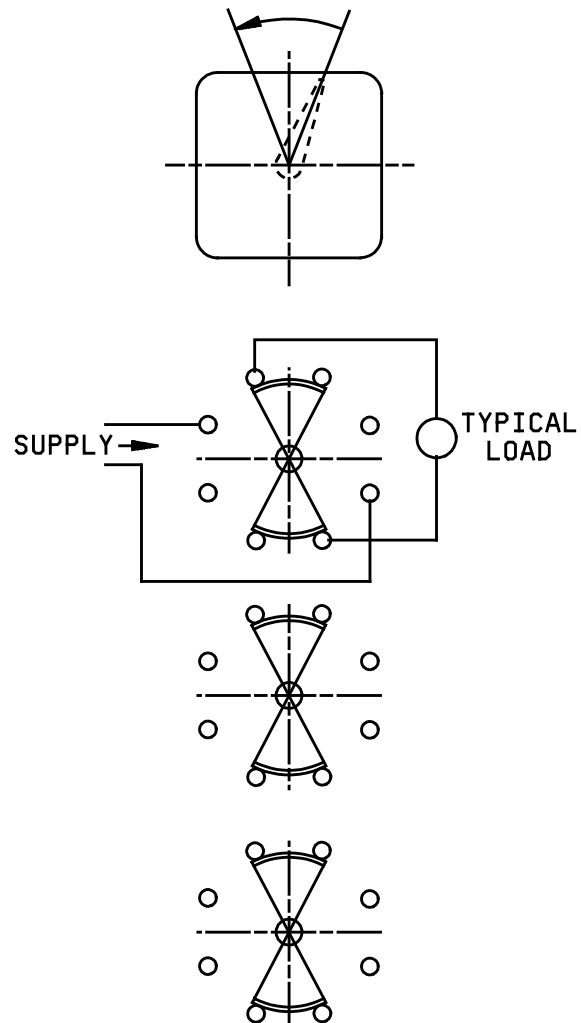


FIGURE 6. Wiring diagram. (05)
(as viewed from back of switch)

MIL-DTL-15743/18C

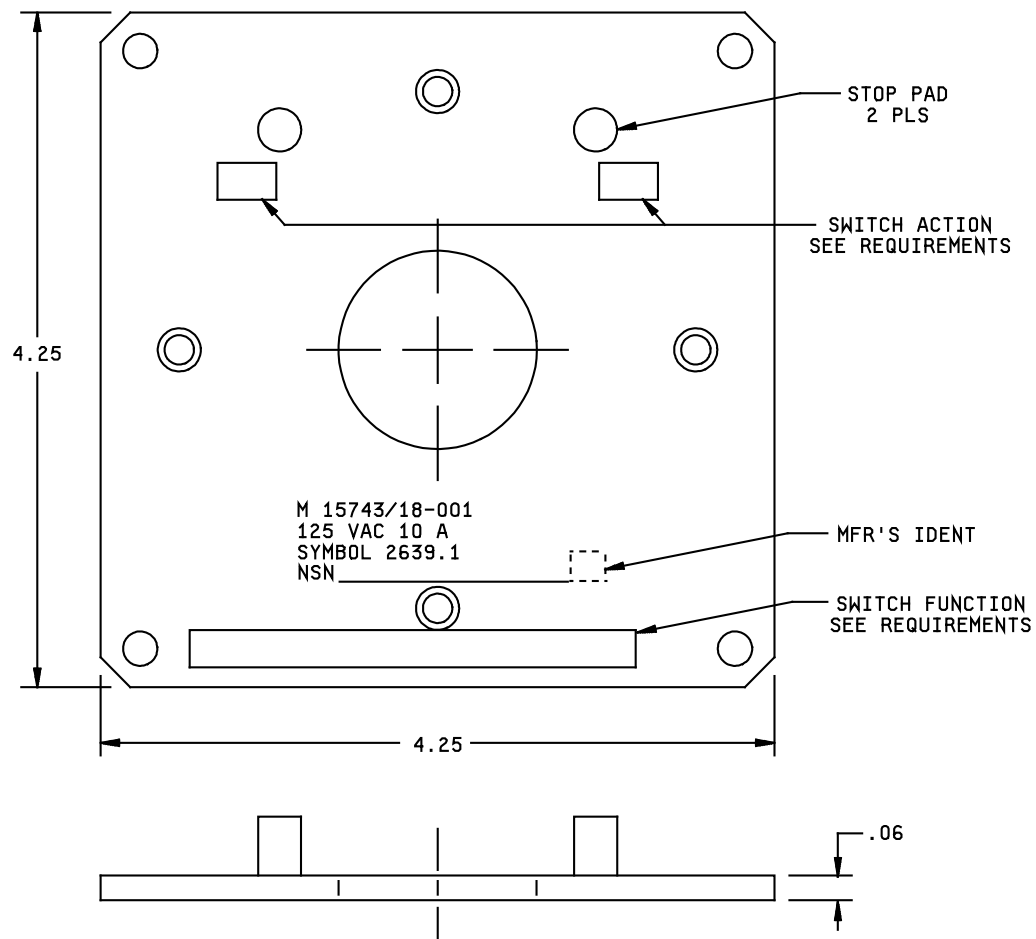


FIGURE 7. Identification plate (06)

MIL-DTL-15743/18C

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 V ac, 0-10 ampere, 60 Hz.

Dimensions and configuration: See figures 1 through 4.

Wiring diagram: See figure 6.

Mounting dimensions: See figure 5.

Degree of enclosure: Submersible (15 feet).

Weight: 4 pounds maximum.

Designation and marking: See figures 7.

Identification data shall be as shown on figure 7. Unless otherwise specified in the ordering data, switch action and function marking shall be blank.

Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes <u>1/</u>		
			Type	Revision	Date
M15743/18-001	2639.1	Six-pole, 2 position	S2JR3-2	H	7/10/80

1/ From NAVSEA Drawing 803-74055.

ORDERING DATA:

Acquisition documents should specify the following:

Switch action and function marking, if required.

MIL-DTL-15743/18C

TABLE II. Parts list.

Item no. <u>1</u> /	Description	Quantity M15743/18-001	Material/ specification	Remarks
01	Switch, enclosed (sym 2639.1)	-	----	See figure 1
02	Enclosure	1	Brass, MIL-E-24142/5	M24142/5-002 Mod <u>2</u> /
03	O ring seal	1	SAE-AS28775-012 <u>3</u> /	----
04	Handle	1	Brass, ASTM-B36/B36M and ASTM-B121/B121M	See figure 4
05	Switch (type JR 304)	1	MIL-DTL-21604/7	----
06	Identification	1	Brass, ASTM-B36/B36M and ASTM-B121/B121M	See figure 7

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

2/ Modified enclosure positioning pin and positioning hole location (see figures 2 and 3).

3/ SAE-AS28775-010 details are found in SAE-AS28775.

Referenced documents. In addition to MIL-DTL-15743, this document references the following:

MIL-DTL-21604/7

ASTM-B36/B36M

NAVSEA DWG 803-74055

MIL-E-24142/5

ASTM-B121/B121M

SAE-AS28775

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2018-029)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/> .