


DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECEPTACLE, IN-LINE, TRI-START THREADED, REMOVABLE CRIMP CONTACTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-32689/3.

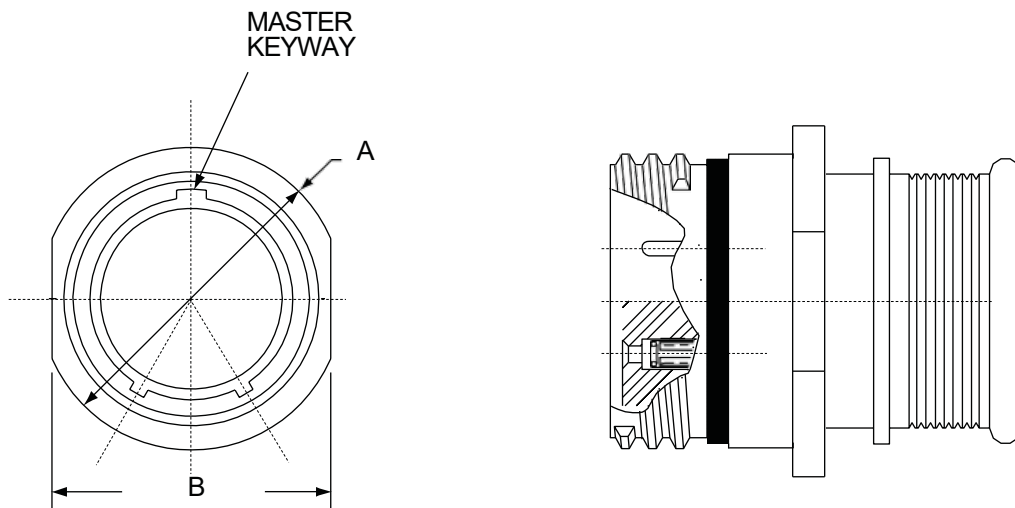

Front view of receptacle (left) and receptacle with integral banding platform (right)

Shell size	A	B
08	0.543	0.513
09	0.608	0.578
10	0.671	0.641
11	0.733	0.703
12	0.796	0.766
15	0.983	0.953
18	1.168	1.138
19	1.238	1.208
23	1.485	1.455

FIGURE 1. Receptacle, inline.



MIL-DTL-32689/7


REQUIREMENTS

This specification shall use MIL-DTL-32689/3 as a base design with the modifications specified herein.

The flange of MIL-DTL-32689/3 shall be modified as specified in figure 1.

Interface dimensions shall conform to MIL-DTL-32689.

Part or Identifying Number (PIN) example:

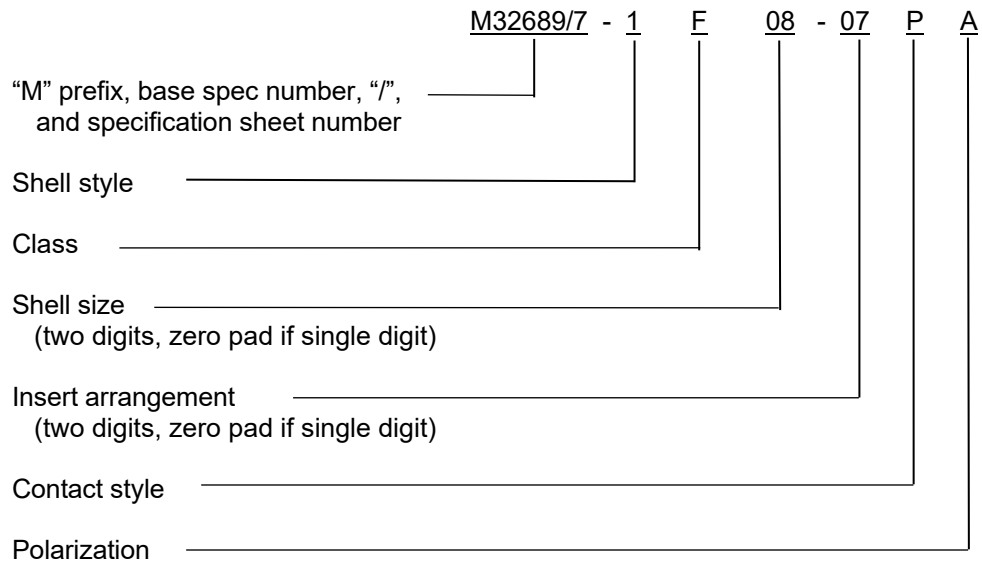

Referenced documents. In addition to MIL-DTL-32689, this document references

MIL-DTL-32689/3

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2022-025)

Review activities:

Navy - EC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.