


DETAIL SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 4 (THREE-HOLE MOUNTING, THROUGH)

Inactive for new design after 9 August 2019

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-5423.

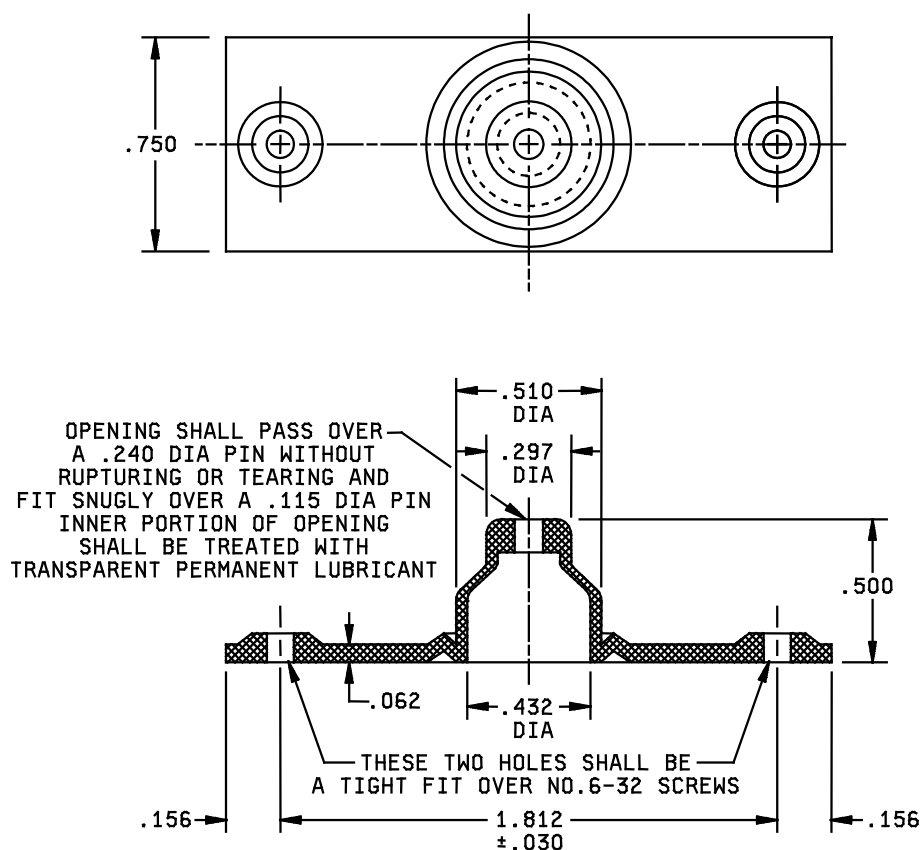

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are $\pm .015$.

FIGURE 1. Boot type A, style 4.



MIL-DTL-5423/3E

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50.

Restoring force: Not applicable.

Operation of guards: Applicable.

Sand and dust: Boots shall be mounted on the applicable switch before the switch is installed on the test enclosure.

Salt spray (corrosion): Not applicable.

Part or Identifying Number (PIN): M5423/03-01.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents:

MIL-DTL-5423

Custodians:

Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5930-2019-017)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/>.