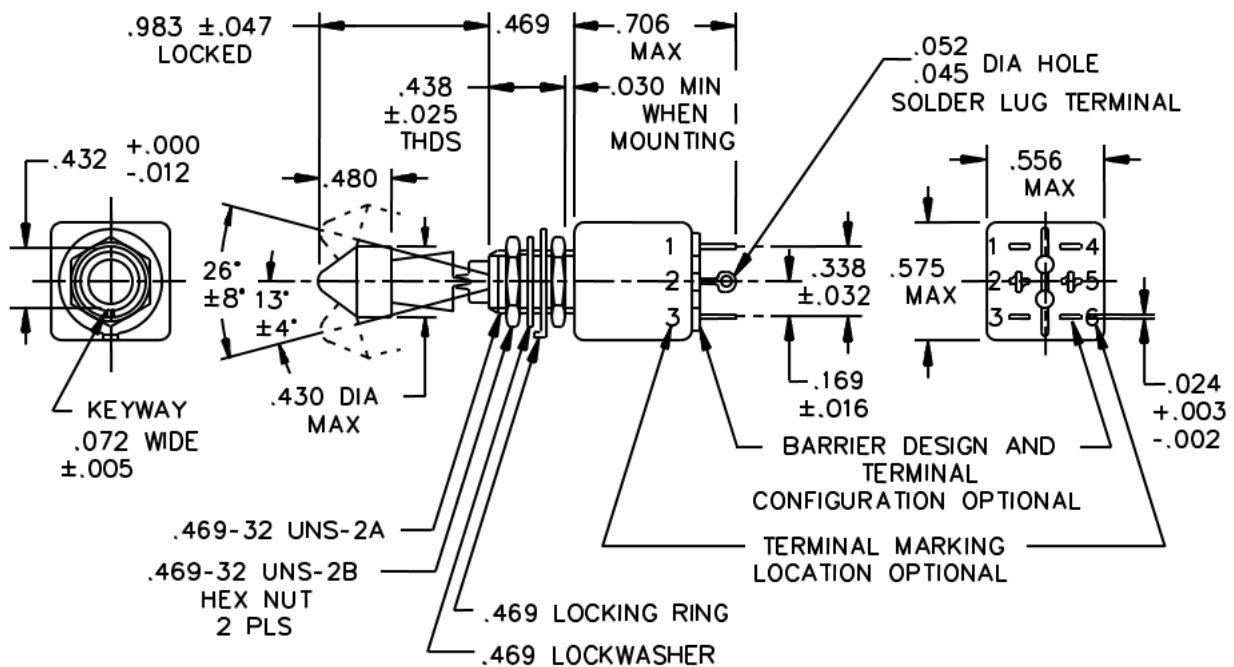



DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, MINIATURE TOGGLE
SEALED, SOLDER LUG, DOUBLE POLE, .469 MOUNTING BUSHING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and [MIL-DTL-8834](#).

FIGURE 1. Dimensions and configuration.

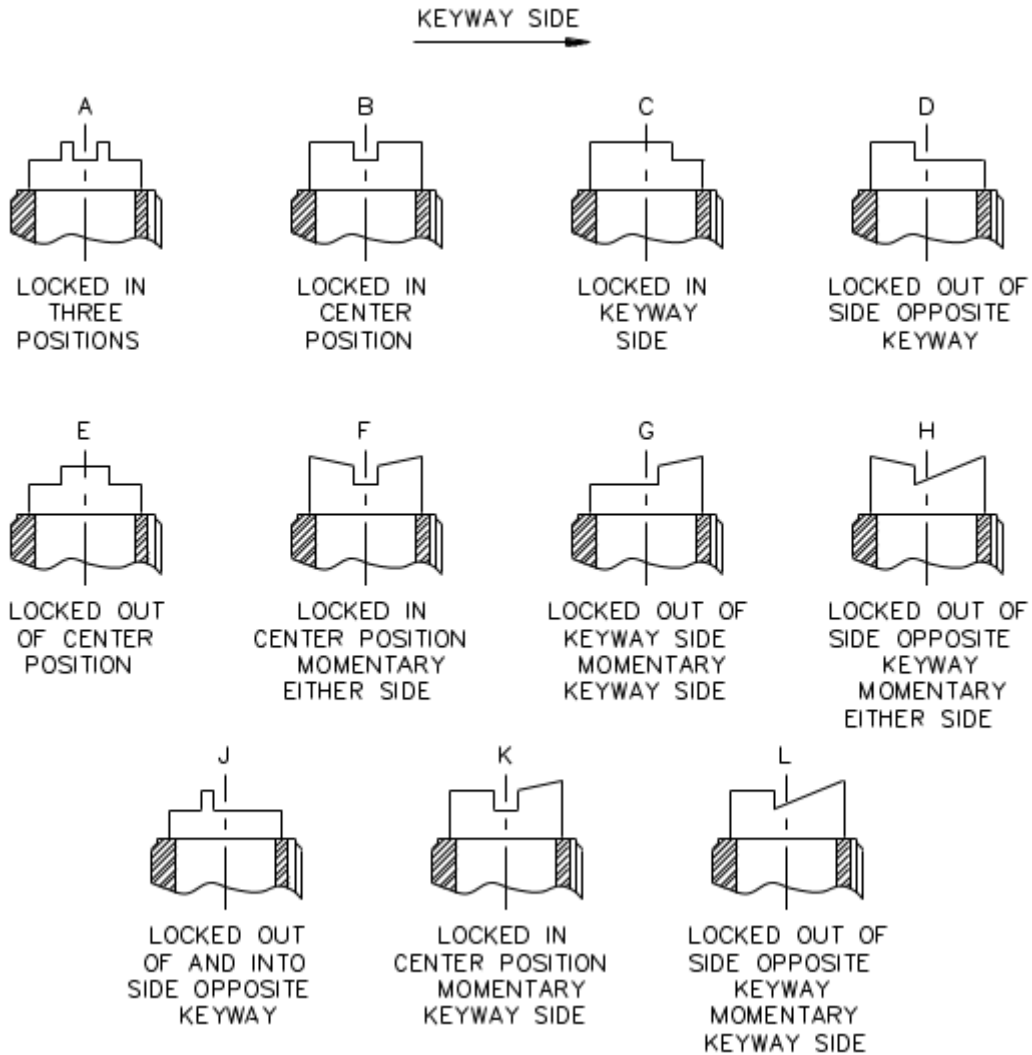

FIGURES A THROUGH L ILLUSTRATE THE LOCKING AND MOMENTARY CONFIGURATION AND NOT THE DETAIL CONSTRUCTION OF THE LOCKING DESIGN

NOTES:

1. Dimensions are in inches.
3. Unless otherwise specified, tolerances are ± 0.010 on decimals and $\pm 5^\circ$ on angles.

FIGURE 1. Dimensions and configuration - Continued.

MS21027T

REQUIREMENTS:

For hardware detail specifications, see appendix of [MIL-DTL-8834](#).

In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Shock: Method I and method II (high impact). The switch shall be electrically and mechanically operative at the conclusion of the shock test except there can be mechanical transfer of the contact mechanism at all levels when tested in accordance with method II (high impact).

Toggle seal test: Method I for 700 and 800 series, method II for 200 and 300 series.

Part or Identifying Number (PIN) shall consist of MS number, locking combination letter and dash number.

Example PIN:

MS21027-B211: Toggle sealed, on-off-on, locked in center position.

MS21027-K281: Toggle sealed, none-off-momentary on, locked in center position.

Strength of terminals: 5 pounds normal to the mounting plane and 2 pounds in the other planes.

Altitude: 50,000 feet.

115 V ac, 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

Maximum weight: .0640 pound (29.0 grams).

Unlocking force: 4 ± 1 pound.

Configuration of switch case housing, terminals, and barriers: Design optional providing maximum dimensions specified are not exceeded.

TABLE I. Detail requirements.

MS dash number <u>1/</u>		Locking combination	Circuit made between terminals as indicated with the toggle lever in these positions: <u>5/</u>			Current capacity in amperes						Low current level switching 5 mV
						Resistive load			Inductive load			
						28 volts	115 volts 60 Hertz ac	400 Hertz ac	28 volts	115 volts 60 Hertz ac	400 Hertz ac	
-711	-211	A, B, D	Opposite keyway side <u>8/</u> on 2-3, 5-6	off	on 1-2, 4-5	5	2	3	1 <u>6/</u>	1	2	25 μA <u>7/</u>
-721	-221	C, E		none	off							
-731	-231				on 1-2, 4-5							
-741	-241	J, B		off	none							
-771 <u>4/</u>	-271 <u>4/</u>	F, H	mom-on 2-3, 5-6	off	mom-on 1-2, 4-5							
-781 <u>4/</u>	-281 <u>4/</u>	K	none									
-811	-311	G, K, L	on 2-3, 5-6									
-821 <u>2/ 3/</u>	-321	K	none	on 2-3, 5-6	mom-on 1-2, 4-5							
-831 <u>2/ 3/</u>	-331	A, B, C, D	on 2-3, 5-6	on 2-3, 4-5	on 1-2, 4-5							
-841 <u>2/ 3/</u>	-341	F, H	mom-on 2-3, 5-6	on 2-3, 4-5	mom-on 1-2, 4-5							
-851 <u>2/ 3/</u>	-351	G, K, L	on 2-3, 5-6	on 2-3, 4-5	mom-on 1-2, 4-5							
-871	-371	F, H	mom-on 2-3, 5-6	off	mom-on 1-2, 4-5							
-881	-381	K	none	off	mom-on 1-2, 4-5							

1/ 700 and 800 series toggle seal (water) 15 foot head; 200 and 300 series toggle seal (water) .500 inch head.

2/ Delayed action of the switch toggle lever may cause circuit to close or open before snap action mechanism trips.

3/ Dielectric withstanding voltage: 1,200 V rms at sea level (center on circuits).

4/ PIN -771, -781, -271, and -281 are inactive for new design, use -871, -881, -371, and -381.

5/ Direction of movement of internal mechanism is opposite to the direction of the toggle movement.

6/ With time constant of .020 $\pm$.002 second.

7/ Contact resistance not to exceed 50 Ω during life, low current level switching.

8/ Nonfunctional terminals shall not be supplied.

Referenced documents:

[MIL-DTL-8834](#)

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5930-2022-071)

Review activities:

Army - MI
Navy - EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/>.