


MIL-PRF-39019/6H  
w/AMENDMENT 1  
5 March 2025

---

SUPERSEDING  
MIL-PRF-39019/6H  
14 May 2010

CIRCUIT BREAKERS, MAGNETIC, LOW-POWER, SEALED, TRIP-FREE  
THREE-POLE, AUXILIARY CONTACTS

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39019.



MIL-PRF-39019/6H  
w/AMENDMENT 1


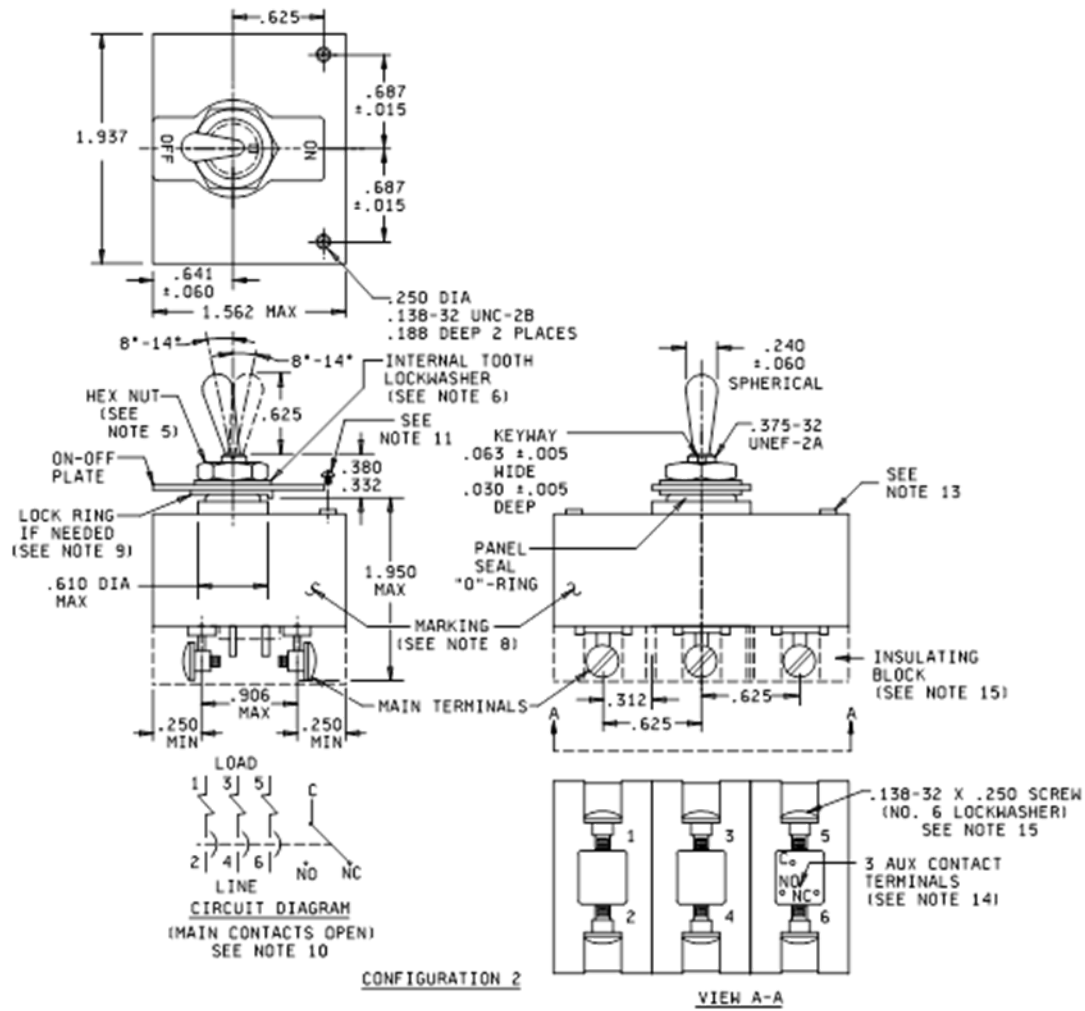


FIGURE 1. Circuit breaker configuration - Continued.

MIL-PRF-39019/6H  
w/AMENDMENT 1

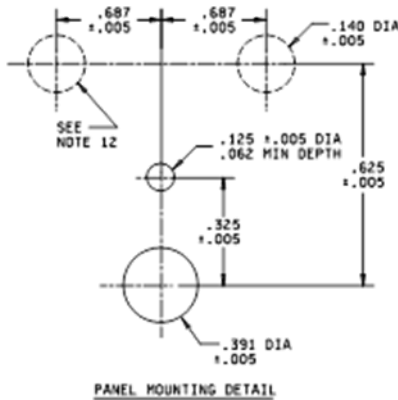

| Inches | mm   | Inches | mm   | Inches | mm   | Inches | mm    | Inches | mm    |
|--------|------|--------|------|--------|------|--------|-------|--------|-------|
| .005   | 0.13 | .125   | 3.18 | .325   | 8.26 | .392   | 9.96  | .687   | 17.45 |
| .015   | 0.38 | .138   | 3.51 | .332   | 8.43 | .493   | 12.52 | .906   | 23.01 |
| .030   | 0.76 | .140   | 3.56 | .375   | 9.52 | .507   | 12.88 | 1.562  | 39.67 |
| .060   | 1.52 | .188   | 4.78 | .380   | 9.65 | .610   | 15.49 | 1.828  | 46.43 |
| .062   | 1.57 | .240   | 6.10 | .382   | 9.70 | .625   | 15.88 | 1.937  | 49.20 |
| .063   | 1.60 | .250   | 6.35 | .391   | 9.93 | .641   | 16.28 | 1.950  | 49.53 |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is  $\pm 0.031$  (0.79 mm).
4. The shape of the circuit breaker is shown for information only. Slight deviations from this outline drawing, which do not alter the functional aspect of the device, are acceptable.
5. Hex mounting nut .375-32 UNEF-2B thread,  $.093 \pm 0.005$  (2.36  $\pm$  0.13 mm) thick or equivalent [MS25082-20](#), -B20.
6. Internal tooth lockwasher, .507/.493 O.D., .392/.382 I.D.,  $.025 \pm 0.005$  (0.64  $\pm$  0.13mm) thick, stainless steel or equivalent [AIA/NAS NASM35333-134](#).
7. The effective bushing thread length (not including mounting hardware) is .280 (7.11 mm) minimum.
8. Marking may appear on any surface except the mounting surface.
9. Lock ring not required if on-off plate has locking tab.
10. Numerical marking optional on circuit diagram.
11. Sealscrew, .138-32 UNC-2A x .312 (7.92 mm) long, stainless steel number 18-8 (type 347) [MS35265-25](#) or equivalent with appropriate O-rings. O-rings should be chosen to enable the circuit breaker to meet the performance requirements of this specification. Possible source: AMP Hexseal Corporation.
12. Use of panel screws will enhance circuit breaker shock and vibration characteristics.
13. Threaded inserts exceed height of bushing by .005 to .015 (0.13 mm to 0.38 mm).
14. Auxiliary contact terminals shall be located on the back side of the circuit breaker (same surface as main terminals), but otherwise their location, style, and form shall be optional, consistent with dimensional or other specified requirements. Auxiliary contact terminals shall accommodate two number 20 AWG wires.
15. For configuration 2 add "S" at end of dash number for screw terminals with insulating block (see [table I](#)). When circuit breakers are subjected to the resistance to solvents test, the insulating block shall be removed and shall not be tested. Main terminal screw [MS35265-26](#) or equivalent.

FIGURE 1. Circuit breaker configuration - Continued.

MIL-PRF-39019/6H  
w/AMENDMENT 1

REQUIREMENTS:

Dimensions and configuration: See [figure 1](#) and note 15.

Weight: For reference only, approximately 150 grams.

Mounting hardware: See [figure 1](#).

Terminals: See [figure 1](#).

Voltage and frequency rating: 50 V dc, maximum and 240 V ac, maximum at 60 Hz and 400 Hz.

High inrush: 800 percent at 60 Hz and dc, 1,400 percent at 400 Hz (see [table I](#)).

Current rating: See [table I](#).

Circuit diagram: See [figure 1](#).

Time delay: See [table I](#).

Resistance or impedance: See [table I](#).

Part or Identifying Number (PIN): The PIN shall be M39019/06-(dash number taken from [table I](#)) (e.g., M39019/06-200, M39019/06-200S).

Cross reference: See [table II](#).

TABLE I. Circuit breaker dash numbers and applicable characteristics.

| Dash number <u>1/</u> |             | Current rating (amps) | Time delay | Resistance or impedance (ohms - max) <u>2/</u> |       |        |
|-----------------------|-------------|-----------------------|------------|------------------------------------------------|-------|--------|
| Standard delay        | High inrush |                       |            | DC                                             | 60 Hz | 400 Hz |
| 200                   | 300         | 0.05                  | A          | 680.0                                          | 690.0 | 710.0  |
| 201                   | 301         | 0.05                  | B          | 680.0                                          | 690.0 | 710.0  |
| 202                   | ---         | 0.05                  | C          | 680.0                                          | 690.0 | 710.0  |
| 203                   | 302         | 0.1                   | A          | 150.0                                          | 170.0 | 180.0  |
| 204                   | 303         | 0.1                   | B          | 150.0                                          | 170.0 | 180.0  |
| 205                   | ---         | 0.1                   | C          | 150.0                                          | 170.0 | 180.0  |
| 206                   | 304         | 0.25                  | A          | 20.0                                           | 26.0  | 27.0   |
| 207                   | 305         | 0.25                  | B          | 20.0                                           | 26.0  | 27.0   |
| 208                   | ---         | 0.25                  | C          | 20.0                                           | 26.0  | 27.0   |
| 209                   | 306         | 0.5                   | A          | 5.4                                            | 6.0   | 6.6    |
| 210                   | 307         | 0.5                   | B          | 5.4                                            | 6.0   | 6.6    |
| 211                   | ---         | 0.5                   | C          | 5.4                                            | 6.0   | 6.6    |
| 212                   | 308         | 0.75                  | A          | 2.5                                            | 2.7   | 2.8    |
| 213                   | 309         | 0.75                  | B          | 2.5                                            | 2.7   | 2.8    |
| 214                   | ---         | 0.75                  | C          | 2.5                                            | 2.7   | 2.8    |
| 215                   | 310         | 1.0                   | A          | 1.35                                           | 1.5   | 1.61   |

See footnotes at end of table.

MIL-PRF-39019/6H  
w/AMENDMENT 1

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

| Dash number <u>1/</u> |             | Current rating (amps) | Time delay | Resistance or impedance (ohms - max) <u>2/</u> |       |        |
|-----------------------|-------------|-----------------------|------------|------------------------------------------------|-------|--------|
| Standard delay        | High inrush |                       |            | DC                                             | 60 Hz | 400 Hz |
| 216                   | 311         | 1.0                   | B          | 1.35                                           | 1.5   | 1.61   |
| 217                   | ---         | 1.0                   | C          | 1.35                                           | 1.5   | 1.61   |
| 218                   | 312         | 2.0                   | A          | 0.40                                           | 0.40  | 0.50   |
| 219                   | 313         | 2.0                   | B          | 0.40                                           | 0.40  | 0.50   |
| 220                   | ---         | 2.0                   | C          | 0.40                                           | 0.40  | 0.50   |
| 221                   | 314         | 2.5                   | A          | 0.25                                           | 0.25  | 0.27   |
| 222                   | 315         | 2.5                   | B          | 0.25                                           | 0.25  | 0.27   |
| 223                   | ---         | 2.5                   | C          | 0.25                                           | 0.25  | 0.27   |
| 224                   | 316         | 3.0                   | A          | 0.15                                           | 0.15  | 0.17   |
| 225                   | 317         | 3.0                   | B          | 0.15                                           | 0.15  | 0.17   |
| 226                   | ---         | 3.0                   | C          | 0.15                                           | 0.15  | 0.17   |
| 227                   | 318         | 4.0                   | A          | 0.10                                           | 0.10  | 0.12   |
| 228                   | 319         | 4.0                   | B          | 0.10                                           | 0.10  | 0.12   |
| 229                   | ---         | 4.0                   | C          | 0.10                                           | 0.10  | 0.12   |
| 230                   | 320         | 5.0                   | A          | 0.061                                          | 0.063 | 0.072  |
| 231                   | 321         | 5.0                   | B          | 0.061                                          | 0.063 | 0.072  |
| 232                   | ---         | 5.0                   | C          | 0.061                                          | 0.063 | 0.072  |
| 233                   | 322         | 6.0                   | A          | 0.042                                          | 0.043 | 0.050  |
| 234                   | 323         | 6.0                   | B          | 0.042                                          | 0.043 | 0.050  |
| 235                   | ---         | 6.0                   | C          | 0.042                                          | 0.043 | 0.050  |
| 236                   | 324         | 7.0                   | A          | 0.036                                          | 0.036 | 0.040  |
| 237                   | 325         | 7.0                   | B          | 0.036                                          | 0.036 | 0.040  |
| 238                   | ---         | 7.0                   | C          | 0.036                                          | 0.036 | 0.040  |
| 239                   | 326         | 7.5                   | A          | 0.031                                          | 0.031 | 0.038  |
| 240                   | 327         | 7.5                   | B          | 0.031                                          | 0.031 | 0.038  |
| 241                   | ---         | 7.5                   | C          | 0.031                                          | 0.031 | 0.038  |
| 242                   | 328         | 8.0                   | A          | 0.027                                          | 0.028 | 0.035  |
| 243                   | 329         | 8.0                   | B          | 0.027                                          | 0.028 | 0.035  |
| 244                   | ---         | 8.0                   | C          | 0.027                                          | 0.028 | 0.035  |
| 245                   | 330         | 9.0                   | A          | 0.022                                          | 0.022 | 0.028  |
| 246                   | 331         | 9.0                   | B          | 0.022                                          | 0.022 | 0.028  |
| 247                   | ---         | 9.0                   | C          | 0.022                                          | 0.022 | 0.028  |
| 248                   | 332         | 10.0                  | A          | 0.018                                          | 0.021 | 0.024  |
| 249                   | 333         | 10.0                  | B          | 0.018                                          | 0.021 | 0.024  |
| 250                   | ---         | 10.0                  | C          | 0.018                                          | 0.021 | 0.024  |

See footnotes at end of table.

MIL-PRF-39019/6H  
w/AMENDMENT 1

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

| Dash number <u>1/</u> |             | Current rating (amps) | Time delay | Resistance or impedance (ohms - max) <u>2/</u> |       |        |
|-----------------------|-------------|-----------------------|------------|------------------------------------------------|-------|--------|
| Standard delay        | High inrush |                       |            | DC                                             | 60 Hz | 400 Hz |
| 251                   | 334         | 12.5                  | A          | 0.012                                          | 0.013 | 0.015  |
| 252                   | 335         | 12.5                  | B          | 0.012                                          | 0.013 | 0.015  |
| 253                   | ---         | 12.5                  | C          | 0.012                                          | 0.013 | 0.015  |
| 254                   | 336         | 15.0                  | A          | 0.009                                          | 0.009 | 0.010  |
| 255                   | 337         | 15.0                  | B          | 0.009                                          | 0.009 | 0.010  |
| 256                   | ---         | 15.0                  | C          | 0.009                                          | 0.009 | 0.010  |
| 257                   | 338         | 20.0                  | A          | 0.006                                          | 0.006 | 0.007  |
| 258                   | 339         | 20.0                  | B          | 0.006                                          | 0.006 | 0.007  |
| 259                   | ---         | 20.0                  | C          | 0.006                                          | 0.006 | 0.007  |
| 260                   | 340         | 1.25                  | A          | 0.9                                            | 1.0   | 1.1    |
| 261                   | 341         | 1.25                  | B          | 0.9                                            | 1.0   | 1.1    |
| 262                   | ---         | 1.25                  | C          | 0.9                                            | 1.0   | 1.1    |
| 263                   | 342         | 1.5                   | A          | 0.65                                           | 0.70  | 0.75   |
| 264                   | 343         | 1.5                   | B          | 0.65                                           | 0.70  | 0.75   |
| 265                   | ---         | 1.5                   | C          | 0.65                                           | 0.70  | 0.75   |

1/ For configuration 2, add "S" at end of dash number.

2/ The corresponding maximum wattage losses, which in no case shall exceed 3.0 watts, may be calculated as  $I^2R$  or  $I^2Z$ .

MIL-PRF-39019/6H  
w/AMENDMENT 1

TABLE II. Cross reference of superseded part numbers.

| Superseded<br>MIL-C-39019/6B<br>part number<br>M39019/6- | New<br>part number<br>M39019/06- | Superseded<br>MIL-C-39019/6B<br>part number<br>M39019/6- | New<br>part number<br>M39019/06- | Superseded<br>MIL-C-39019/6B<br>part number<br>M39019/6- | New<br>part number<br>M39019/06- |
|----------------------------------------------------------|----------------------------------|----------------------------------------------------------|----------------------------------|----------------------------------------------------------|----------------------------------|
| 1                                                        | 200                              | 41                                                       | 230                              | 81                                                       | 218                              |
| 2                                                        | 201                              | 42                                                       | 231                              | 82                                                       | 219                              |
| 3                                                        | 200                              | 43                                                       | 230                              | 83                                                       | 218                              |
| 4                                                        | 201                              | 44                                                       | 231                              | 84                                                       | 219                              |
| 5                                                        | 200                              | 45                                                       | 230                              | 85                                                       | 218                              |
| 6                                                        | 201                              | 46                                                       | 231                              | 86                                                       | 219                              |
| 7                                                        | 200                              | 47                                                       | 230                              | 87                                                       | 227                              |
| 8                                                        | 201                              | 48                                                       | 231                              | 88                                                       | 228                              |
| 9                                                        | 200                              | 49                                                       | 230                              | 89                                                       | 227                              |
| 10                                                       | 201                              | 50                                                       | 231                              | 90                                                       | 228                              |
| 11                                                       | 209                              | 51                                                       | 248                              | 91                                                       | 227                              |
| 12                                                       | 210                              | 52                                                       | 249                              | 92                                                       | 228                              |
| 13                                                       | 209                              | 53                                                       | 248                              | 93                                                       | 233                              |
| 14                                                       | 210                              | 54                                                       | 249                              | 94                                                       | 234                              |
| 15                                                       | 209                              | 55                                                       | 248                              | 95                                                       | 233                              |
| 16                                                       | 210                              | 56                                                       | 249                              | 96                                                       | 234                              |
| 17                                                       | 209                              | 57                                                       | 248                              | 97                                                       | 233                              |
| 18                                                       | 210                              | 58                                                       | 249                              | 98                                                       | 234                              |
| 19                                                       | 209                              | 59                                                       | 248                              | 99                                                       | 236                              |
| 20                                                       | 210                              | 60                                                       | 249                              | 100                                                      | 237                              |
| 21                                                       | 215                              | 61                                                       | 254                              | 101                                                      | 236                              |
| 22                                                       | 216                              | 62                                                       | 255                              | 102                                                      | 237                              |
| 23                                                       | 215                              | 63                                                       | 254                              | 103                                                      | 236                              |
| 24                                                       | 216                              | 64                                                       | 255                              | 104                                                      | 237                              |
| 25                                                       | 215                              | 65                                                       | 254                              | 105                                                      | 242                              |
| 26                                                       | 216                              | 66                                                       | 255                              | 106                                                      | 243                              |
| 27                                                       | 215                              | 67                                                       | 254                              | 107                                                      | 242                              |
| 28                                                       | 216                              | 68                                                       | 255                              | 108                                                      | 243                              |
| 29                                                       | 215                              | 69                                                       | 254                              | 109                                                      | 242                              |
| 30                                                       | 216                              | 70                                                       | 255                              | 110                                                      | 243                              |
| 31                                                       | 224                              | 71                                                       | 257                              | 111                                                      | 245                              |
| 32                                                       | 225                              | 72                                                       | 258                              | 112                                                      | 246                              |
| 33                                                       | 224                              | 73                                                       | 257                              | 113                                                      | 245                              |
| 34                                                       | 225                              | 74                                                       | 258                              | 114                                                      | 246                              |
| 35                                                       | 224                              | 75                                                       | 257                              | 115                                                      | 245                              |
| 36                                                       | 225                              | 76                                                       | 258                              | 116                                                      | 246                              |
| 37                                                       | 224                              | 77                                                       | 257                              | 117                                                      | 251                              |
| 38                                                       | 225                              | 78                                                       | 258                              | 118                                                      | 252                              |
| 39                                                       | 224                              | 79                                                       | 257                              | 119                                                      | 251                              |
| 40                                                       | 225                              | 80                                                       | 258                              | 120                                                      | 252                              |
|                                                          |                                  |                                                          |                                  | 121                                                      | 251                              |
|                                                          |                                  |                                                          |                                  | 122                                                      | 252                              |

MIL-PRF-39019/6H  
w/AMENDMENT 1

Referenced documents. In addition to [MIL-PRF-39019](#), this specification sheet references the following documents:  
[MS25082](#)  
[AIA/NAS NASM35333](#)  
[MS35265](#)

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:

Army - CR  
Navy - EC  
Air Force - 85  
DLA - CC

Preparing activity:

DLA - CC

(Project 5925-2025-007)

Review activities:

Army - AT, AV, MI  
Navy - AS, MC  
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/>.