

REVISIONS			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Page 14, add new paragraph 6.5: Patents.	1985-10-24	I. R. Jones
B	Add three more configurations to drawing. Changed material paragraph. Editorial changes throughout.	1987-08-31	D. E. Morgan
C	Changed location of M/2 dimension on configurations E and F of figure 1. Editorial changes throughout.	1987-12-29	Randy Larson
D	Changed center hole in configurations D and E of figure 1. Updated vendor addresses. Editorial changes throughout.	1988-12-15	Randy Larson
E	Changes in accordance with Notice of Revision 5998-R001-95.	1994-11-14	John F. Raye
F	Inactivate for new design materials contained herein. Add supersession table to section six. Change FSC from 5999 to 5998. Editorial changes throughout.	1997-12-19	Monica L. Poelking
G	Removed references to superseded documents, updated vendor contact information, added environmentally preferable material paragraph, and editorial changes throughout.	2004-06-04	Thomas M. Hess
H	Update format to comply with section 508.	2023-08-22	Muhammad Akbar

CURRENT DESIGN ACTIVITY CAGE CODE 037Z3
 DEFENSE LOGISTICS AGENCY
 DLA LAND AND MARITIME,
 COLUMBUS, OHIO 43218-3990

INACTIVE FOR NEW DESIGN
 AFTER 19 DECEMBER 1997
 Device types contained herein are inactive for new design.
 FOR NEW DESIGN USE CID A-A-55563.



Prepared in accordance with [ASME Y14.100](#)

Source controlled drawing

Revision Status of Sheets


REV																					
SHEET																					
REV	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
SHEET	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21

PMIC N/A Original date of drawing 7 June 1985	PREPARED BY Dan McGrath		DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OH 45444	
	CHECKED BY Randy Larson		TITLE HOLDER, ELECTRICAL CARD, CARD GUIDE, METAL, WITHOUT FLARED ENTRY	
	APPROVED BY Ivan R. Jones			
	SIZE A	CAGE CODE 14933	DWG NO. 85020	
	REV H	PAGE 1 OF 21		

1. SCOPE

1.1 Scope. This drawing describes the requirements for a family of card holders intended for use with printed circuit boards.

1.2 Part or Identifying Number (PIN). The complete PIN shall be as follows:

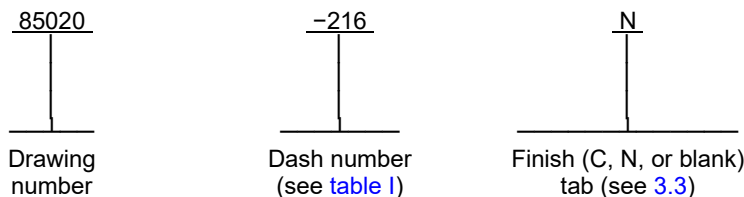

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this drawing. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this drawing, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

STANDARDS

DEPARTMENT OF DEFENSE

[MIL-STD-1285](#) - Marking of Electrical and Electronic Parts.

(Copies of these documents are available online at <https://quicksearch.dla.mil>).

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

ASTM INTERNATIONAL (ASTM)

ASTM A366/A366M - Standard Specification for Commercial Steel (CS) Sheet, Carbon, (0.15 Maximum Percent), Cold-Rolled.
ASTM A967 - Standard Specification for Chemical Passivation Treatments for Stainless Steel Parts.
ASTM B194 - Standard Specification for Copper-Beryllium Alloy Plate, Sheet, Strip, and Rolled Bar.

(Copies of these documents are available online at <https://www.astm.org>.)

SAE INTERNATIONAL (SAE)

SAE AMS 5517 - Steel, Corrosion Resistant, Sheet and Strip (UNS S30100).
SAE AMS-QQ-N-290 - Nickel Plating (Electrodeposited).
SAE AMS-QQ-P-416 - Plating Cadmium (Electrodeposited).

(Copies of these documents are available online at <https://www.sae.org>.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

**DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO**

SIZE

A

**CAGE CODE
14933**

REV H

**DWG NO.
85020**

PAGE 2

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Interface and physical dimensions. See figure 1 and [table I](#).

3.2 Material. Material shall be as specified in [table I](#). Beryllium copper shall be in accordance with [ASTM B194](#). Steel shall be in accordance with [ASTM A366/A366M](#) (NOTE: Stainless steel in accordance with [SAE AMS 5517](#) (UNS C30100) may be used in lieu of steel). For configurations A, B, D, and E, the material thickness shall be $.008 \pm .002$ inch (0.20 ± 0.05 mm). For configurations C and F, the material thickness shall be $.005 \pm .001$ inch (0.13 ± 0.03 mm). Parts constructed of BH material (see [table I](#)) shall have an additional one-quarter heat treat in accordance with [ASTM B194](#).

3.3 Finish. Card holders constructed of beryllium copper or steel shall be finished with either cadmium plate in accordance with [SAE AMS-QQ-P-416](#), type II, class 2 or nickel plate in accordance with [SAE AMS-QQ-N-290](#), class 1, grade G (bright). Card holders with a cadmium plated finish shall include a suffix "C" and card holders with a nickel plated finish shall include a suffix "N" (see [1.2](#)). Card holders constructed of stainless steel shall be passivated in accordance with [ASTM A967](#) (Nitric 2). No finish suffix is needed for passivated stainless steel card holders and the finish suffix in the PIN shall be left blank.

3.4 DLA Land and Maritime certificate of compliance. A certificate of compliance shall be submitted to DLA Land and Maritime-VAC by each manufacturer desiring to be listed as a suggested source of supply (see [6.5](#)). The certificate shall state that the manufacturer's product meets all the requirements of this drawing.

3.4.1 Optional statement of compliance in lieu of testing. The acquiring activity, at its discretion, may accept from the manufacturer a statement of compliance in lieu of the manufacturer performing the inspection of product for delivery tests (see [4.1.2](#) and [6.2.c](#)).



3.5 Marking. Marking of the card holder is not required; however, each unit package shall be marked in accordance with [MIL-STD-1285](#) and include the PIN as specified herein (see [1.2](#)), the manufacturer's name or Commercial and Government Entity (CAGE) code, and date lot codes.

3.6 Certification as approved source of supply. In order to be listed as an approved source of supply of diodes compliant to this drawing (see [6.5](#)), a manufacturer shall submit a certificate of compliance to DLA Land and Maritime - VAC prior to listing as an approved source of supply. The certificate of compliance shall state that the manufacturer's product meets the requirements herein.

3.7 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.



3.8 Workmanship. Card holders shall be processed in such a manner as to be uniform in quality and shall be free from surface and finish flaws that could affect life or serviceability. Finish shall be smooth and edges shall be rounded. Chipping, cracking, deterioration, disintegration, or burrs are unacceptable.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 3

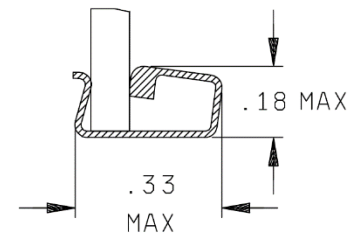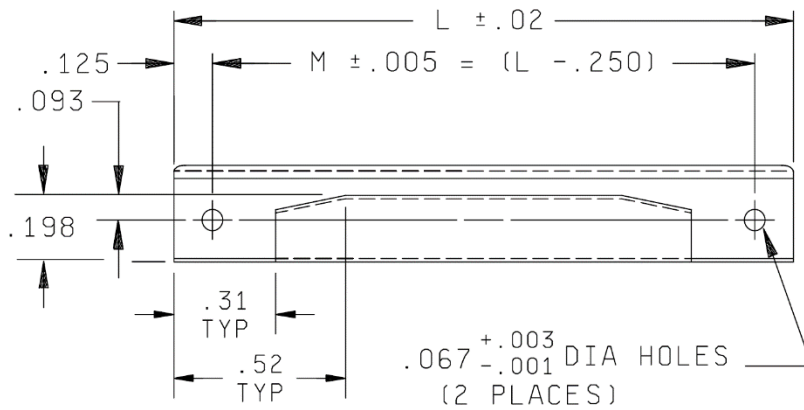



VIEW WITH
BOARD INSERTED

Configuration A

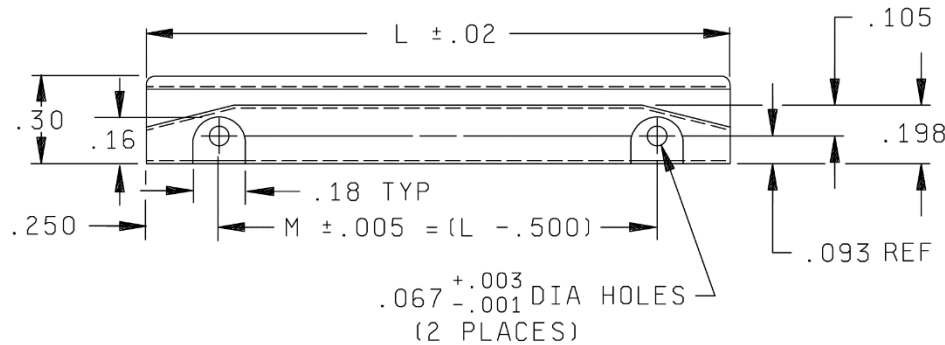

VIEW WITH
BOARD INSERTED

Configuration B

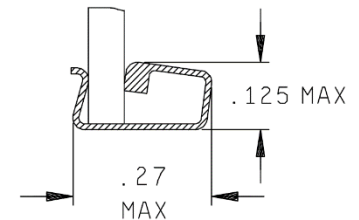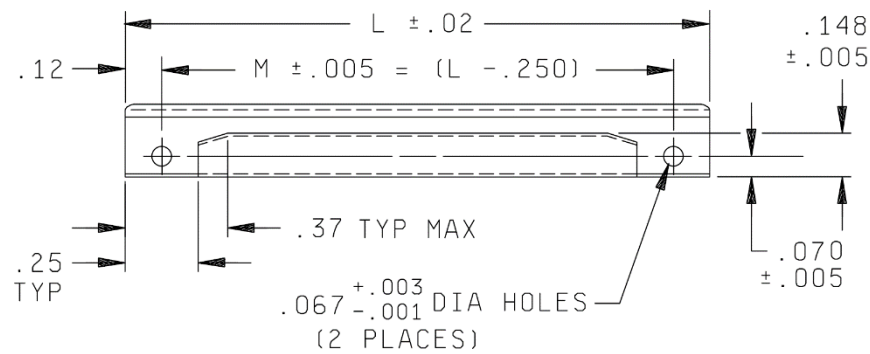

VIEW WITH
BOARD INSERTED

Configuration C

FIGURE 1. Dimensions and configurations.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE


A

CAGE CODE
14933


REV H

DWG NO.
85020


PAGE 4

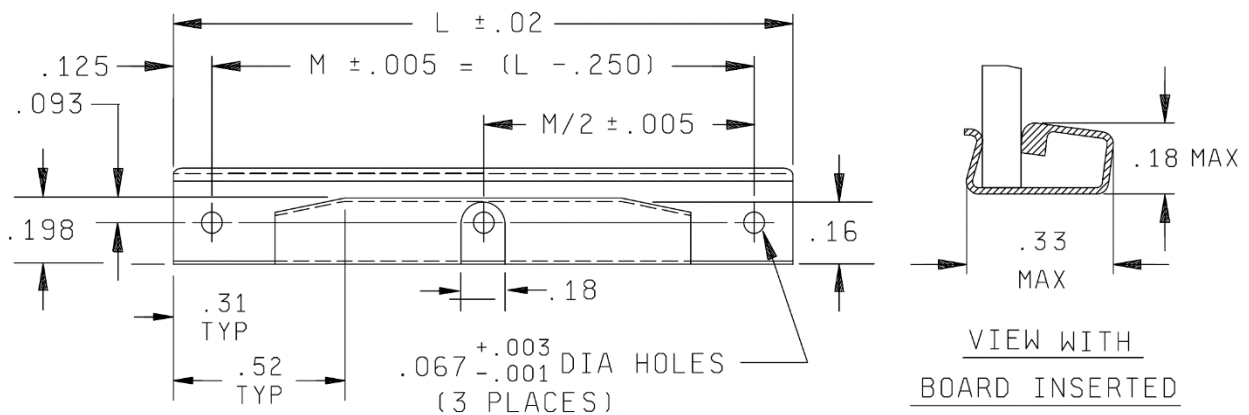

Configuration D

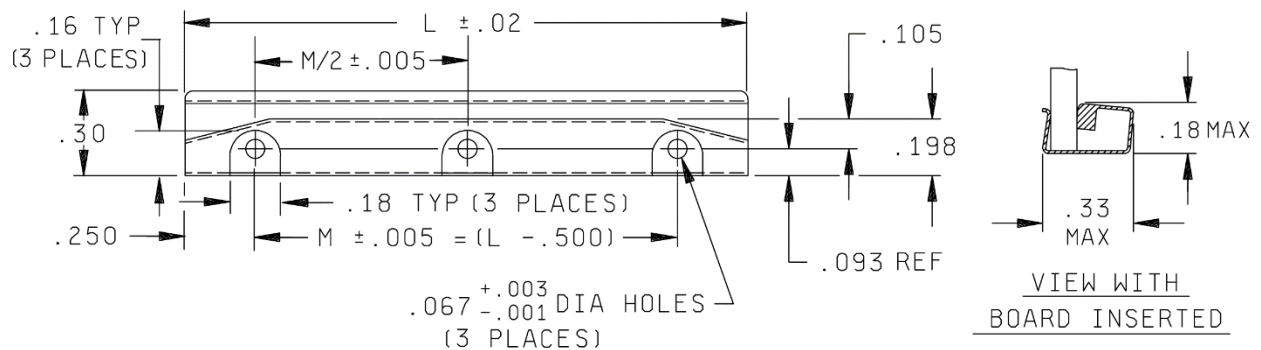

Configuration E

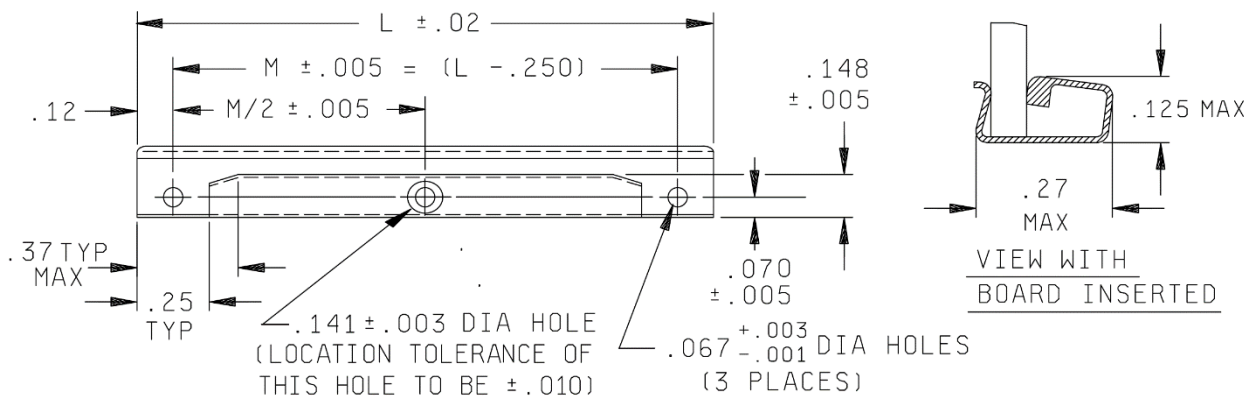

Configuration F

FIGURE 1. Dimensions and configurations - Continued.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE

A

CAGE CODE
14933

REV H

DWG NO.
85020

PAGE 5

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.067	1.70	.125	3.18	.198	5.03	.31	7.9
.003	0.08	.070	1.78	.141	3.58	.25	6.4	.33	8.4
.005	0.13	.093	2.36	.148	3.76	.250	6.35	.37	9.4
.010	0.25	.105	2.67	.16	4.1	.27	6.86	.500	12.7
.02	0.5	.12	3.0	.18	4.6	.30	7.6	.52	13.2

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are $\pm .02$ (0.5 mm) on two place decimals and $\pm .010$ (0.25 mm) on three place decimals.

FIGURE 1. Dimensions and configurations - Continued.

TABLE I. Dash numbers.

Dash Number 1/	Material B - Beryllium copper BH - Beryllium copper (1/4 HT) S - Steel or stainless steel	Length (inches) L	Board slot thickness $\pm .005$ (0.13 mm) A = .0312 (0.79 mm) B = .0625 (1.59 mm) C = .0937 (2.38 mm)	Configuration
001*	B	2.0 (50.8 mm)	A	A
002*	BH	2.0 (50.8 mm)	A	D
003*	S	2.0 (50.8 mm)	A	A
004*	B	2.0 (50.8 mm)	B	A
005*	BH	2.0 (50.8 mm)	B	D
006*	S	2.0 (50.8 mm)	B	A
007*	B	2.0 (50.8 mm)	C	A
008*	BH	2.0 (50.8 mm)	C	D
009*	S	2.0 (50.8 mm)	C	A
010*	B	2.0 (50.8 mm)	A	B
011*	BH	2.0 (50.8 mm)	A	E
012*	S	2.0 (50.8 mm)	A	B
013*	B	2.0 (50.8 mm)	B	B
014*	BH	2.0 (50.8 mm)	B	E
015*	S	2.0 (50.8 mm)	B	B
016*	B	2.0 (50.8 mm)	C	B
017*	BH	2.0 (50.8 mm)	C	E
018*	S	2.0 (50.8 mm)	C	B
019*	B	2.0 (50.8 mm)	A	C
020*	BH	2.0 (50.8 mm)	A	F
021*	S	2.0 (50.8 mm)	A	C
022*	B	2.0 (50.8 mm)	B	C
023*	BH	2.0 (50.8 mm)	B	F
024*	S	2.0 (50.8 mm)	B	C

See footnote at end of table.

**DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO**

SIZE

A

**CAGE CODE
14933**

REV H

**DWG NO.
85020**

PAGE 6

TABLE I. Dash numbers - continued.

Dash Number 1/	Material B – Beryllium copper BH – Beryllium copper (1/4 HT) S – Steel or stainless steel	Length (inches) L	Board slot thickness ±.005 (0.13 mm) A = .0312 (0.79 mm) B = .0625 (1.59 mm) C = .0937 (2.38 mm)	Configuration
025*	B	2.5 (63.5 mm)	A	A
026*	BH	2.5 (63.5 mm)	A	D
027*	S	2.5 (63.5 mm)	A	A
028*	B	2.5 (63.5 mm)	B	A
029*	BH	2.5 (63.5 mm)	B	D
030*	S	2.5 (63.5 mm)	B	A
031*	B	2.5 (63.5 mm)	C	A
032*	BH	2.5 (63.5 mm)	C	D
033*	S	2.5 (63.5 mm)	C	A
034*	B	2.5 (63.5 mm)	A	B
035*	BH	2.5 (63.5 mm)	A	E
036*	S	2.5 (63.5 mm)	A	B
037*	B	2.5 (63.5 mm)	B	B
038*	BH	2.5 (63.5 mm)	B	E
039*	S	2.5 (63.5 mm)	B	B
040*	B	2.5 (63.5 mm)	C	B
041*	BH	2.5 (63.5 mm)	C	E
042*	S	2.5 (63.5 mm)	C	B
043*	B	2.5 (63.5 mm)	A	C
044*	BH	2.5 (63.5 mm)	A	F
045*	S	2.5 (63.5 mm)	A	C
046*	B	2.5 (63.5 mm)	B	C
047*	BH	2.5 (63.5 mm)	B	F
048*	S	2.5 (63.5 mm)	B	C
049*	B	3.0 (76.2 mm)	A	A
050*	BH	3.0 (76.2 mm)	A	D
051*	S	3.0 (76.2 mm)	A	A
052*	B	3.0 (76.2 mm)	B	A
053*	BH	3.0 (76.2 mm)	B	D
054*	S	3.0 (76.2 mm)	B	A
055*	B	3.0 (76.2 mm)	C	A
056*	BH	3.0 (76.2 mm)	C	D
057*	S	3.0 (76.2 mm)	C	A
058*	B	3.0 (76.2 mm)	A	B
059*	BH	3.0 (76.2 mm)	A	E
060*	S	3.0 (76.2 mm)	A	B
061*	B	3.0 (76.2 mm)	B	B
062*	BH	3.0 (76.2 mm)	B	E
063*	S	3.0 (76.2 mm)	B	B

See footnote at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE

A

CAGE CODE
14933

REV H

DWG NO.
85020

PAGE 7

TABLE I. Dash numbers - continued.

Dash Number 1/	Material B – Beryllium copper BH – Beryllium copper (1/4 HT) S – Steel or stainless steel	Length (inches) L	Board slot thickness ±.005 (0.13 mm) A = .0312 (0.79 mm) B = .0625 (1.59 mm) C = .0937 (2.38 mm)	Configuration
064*	B	3.0 (76.2 mm)	C	B
065*	BH	3.0 (76.2 mm)	C	E
066*	S	3.0 (76.2 mm)	C	B
067*	B	3.0 (76.2 mm)	A	C
068*	BH	3.0 (76.2 mm)	A	F
069*	S	3.0 (76.2 mm)	A	C
070*	B	3.0 (76.2 mm)	B	C
071*	BH	3.0 (76.2 mm)	B	F
072*	S	3.0 (76.2 mm)	B	C
073*	B	3.5 (88.9 mm)	A	A
074*	BH	3.5 (88.9 mm)	A	D
075*	S	3.5 (88.9 mm)	A	A
076*	B	3.5 (88.9 mm)	B	A
077*	BH	3.5 (88.9 mm)	B	D
078*	S	3.5 (88.9 mm)	B	A
079*	B	3.5 (88.9 mm)	C	A
080*	BH	3.5 (88.9 mm)	C	D
081*	S	3.5 (88.9 mm)	C	A
082*	B	3.5 (88.9 mm)	A	B
083*	BH	3.5 (88.9 mm)	A	E
084*	S	3.5 (88.9 mm)	A	B
085*	B	3.5 (88.9 mm)	B	B
086*	BH	3.5 (88.9 mm)	B	E
087*	S	3.5 (88.9 mm)	B	B
088*	B	3.5 (88.9 mm)	C	B
089*	BH	3.5 (88.9 mm)	C	E
090*	S	3.5 (88.9 mm)	C	B
091*	B	3.5 (88.9 mm)	A	C
092*	BH	3.5 (88.9 mm)	A	F
093*	S	3.5 (88.9 mm)	A	C
094*	B	3.5 (88.9 mm)	B	C
095*	BH	3.5 (88.9 mm)	B	F
096*	S	3.5 (88.9 mm)	B	C
097*	B	4.0 (101.6 mm)	A	A
098*	BH	4.0 (101.6 mm)	A	D
099*	S	4.0 (101.6 mm)	A	A
100*	B	4.0 (101.6 mm)	B	A
101*	BH	4.0 (101.6 mm)	B	D
102*	S	4.0 (101.6 mm)	B	A

See footnote at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE

A

CAGE CODE
14933

REV H

DWG NO.
85020

PAGE 8

TABLE I. Dash numbers - continued.

Dash Number 1/	Material B - Beryllium copper BH - Beryllium copper (1/4 HT) S - Steel or stainless steel	Length (inches) L	Board slot thickness ±.005 (0.13 mm) A = .0312 (0.79 mm) B = .0625 (1.59 mm) C = .0937 (2.38 mm)	Configuration
103*	B	4.0 (101.6 mm)	C	A
104*	BH	4.0 (101.6 mm)	C	D
105*	S	4.0 (101.6 mm)	C	A
106*	B	4.0 (101.6 mm)	A	B
107*	BH	4.0 (101.6 mm)	A	E
108*	S	4.0 (101.6 mm)	A	B
109*	B	4.0 (101.6 mm)	B	B
110*	BH	4.0 (101.6 mm)	B	E
111*	S	4.0 (101.6 mm)	B	B
112*	B	4.0 (101.6 mm)	C	B
113*	BH	4.0 (101.6 mm)	C	E
114*	S	4.0 (101.6 mm)	C	B
115*	B	4.0 (101.6 mm)	A	C
116*	BH	4.0 (101.6 mm)	A	F
117*	S	4.0 (101.6 mm)	A	C
118*	B	4.0 (101.6 mm)	B	C
119*	BH	4.0 (101.6 mm)	B	F
120*	S	4.0 (101.6 mm)	B	C
121*	B	4.5 (114.3 mm)	A	A
122*	BH	4.5 (114.3 mm)	A	D
123*	S	4.5 (114.3 mm)	A	A
124*	B	4.5 (114.3 mm)	B	A
125*	BH	4.5 (114.3 mm)	B	D
126*	S	4.5 (114.3 mm)	B	A
127*	B	4.5 (114.3 mm)	C	A
128*	BH	4.5 (114.3 mm)	C	D
129*	S	4.5 (114.3 mm)	C	A
130*	B	4.5 (114.3 mm)	A	B
131*	BH	4.5 (114.3 mm)	A	E
132*	S	4.5 (114.3 mm)	A	B
133*	B	4.5 (114.3 mm)	B	B
134*	BH	4.5 (114.3 mm)	B	E
135*	S	4.5 (114.3 mm)	B	B
136*	B	4.5 (114.3 mm)	C	B
137*	BH	4.5 (114.3 mm)	C	E
138*	S	4.5 (114.3 mm)	C	B
139*	B	4.5 (114.3 mm)	A	C
140*	BH	4.5 (114.3 mm)	A	F
141*	S	4.5 (114.3 mm)	A	C

See footnote at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE

A

CAGE CODE
14933

REV H

DWG NO.
85020

PAGE 9

TABLE I. Dash numbers - continued.

Dash Number 1/	Material B – Beryllium copper BH – Beryllium copper (1/4 HT) S – Steel or stainless steel	Length (inches) L	Board slot thickness ±.005 (0.13 mm) A = .0312 (0.79 mm) B = .0625 (1.59 mm) C = .0937 (2.38 mm)	Configuration
142*	B	4.5 (114.3 mm)	B	C
143*	BH	4.5 (114.3 mm)	B	F
144*	S	4.5 (114.3 mm)	B	C
145*	B	5.0 (127.0 mm)	A	A
146*	BH	5.0 (127.0 mm)	A	D
147*	S	5.0 (127.0 mm)	A	A
148*	B	5.0 (127.0 mm)	B	A
149*	BH	5.0 (127.0 mm)	B	D
150*	S	5.0 (127.0 mm)	B	A
151*	B	5.0 (127.0 mm)	C	A
152*	BH	5.0 (127.0 mm)	C	D
153*	S	5.0 (127.0 mm)	C	A
154*	B	5.0 (127.0 mm)	A	B
155*	BH	5.0 (127.0 mm)	A	E
156*	S	5.0 (127.0 mm)	A	B
157*	B	5.0 (127.0 mm)	B	B
158*	BH	5.0 (127.0 mm)	B	E
159*	S	5.0 (127.0 mm)	B	B
160*	B	5.0 (127.0 mm)	C	B
161*	BH	5.0 (127.0 mm)	C	E
162*	S	5.0 (127.0 mm)	C	B
163*	B	5.0 (127.0 mm)	A	C
164*	BH	5.0 (127.0 mm)	A	F
165*	S	5.0 (127.0 mm)	A	C
166*	B	5.0 (127.0 mm)	B	C
167*	BH	5.0 (127.0 mm)	B	F
168*	S	5.0 (127.0 mm)	B	C
169*	B	5.5 (139.7 mm)	A	A
170*	BH	5.5 (139.7 mm)	A	D
171*	S	5.5 (139.7 mm)	A	A
172*	B	5.5 (139.7 mm)	B	A
173*	BH	5.5 (139.7 mm)	B	D
174*	S	5.5 (139.7 mm)	B	A
175*	B	5.5 (139.7 mm)	C	A
176*	BH	5.5 (139.7 mm)	C	D
177*	S	5.5 (139.7 mm)	C	A
178*	B	5.5 (139.7 mm)	A	B
179*	BH	5.5 (139.7 mm)	A	E
180*	S	5.5 (139.7 mm)	A	B

See footnote at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE

A

CAGE CODE
14933

REV H

DWG NO.
85020

PAGE 10

TABLE I. Dash numbers – continued.

Dash Number 1/	Material B – Beryllium copper BH – Beryllium copper (1/4 HT) S – Steel or stainless steel	Length (inches) L	Board slot thickness ±.005 (0.13 mm) A = .0312 (0.79 mm) B = .0625 (1.59 mm) C = .0937 (2.38 mm)	Configuration
181*	B	5.5 (139.7 mm)	B	B
182*	BH	5.5 (139.7 mm)	B	E
183*	S	5.5 (139.7 mm)	B	B
184*	B	5.5 (139.7 mm)	C	B
185*	BH	5.5 (139.7 mm)	C	E
186*	S	5.5 (139.7 mm)	C	B
187*	B	5.5 (139.7 mm)	A	C
188*	BH	5.5 (139.7 mm)	A	F
189*	S	5.5 (139.7 mm)	A	C
190*	B	5.5 (139.7 mm)	B	C
191*	BH	5.5 (139.7 mm)	B	F
192*	S	5.5 (139.7 mm)	B	C
193*	B	6.0 (152.4 mm)	A	A
194*	BH	6.0 (152.4 mm)	A	D
195*	S	6.0 (152.4 mm)	A	A
196*	B	6.0 (152.4 mm)	B	A
197*	BH	6.0 (152.4 mm)	B	D
198*	S	6.0 (152.4 mm)	B	A
199*	B	6.0 (152.4 mm)	C	A
200*	BH	6.0 (152.4 mm)	C	D
201*	S	6.0 (152.4 mm)	C	A
202*	B	6.0 (152.4 mm)	A	B
203*	BH	6.0 (152.4 mm)	A	E
204*	S	6.0 (152.4 mm)	A	B
205*	B	6.0 (152.4 mm)	B	B
206*	BH	6.0 (152.4 mm)	B	E
207*	S	6.0 (152.4 mm)	B	B
208*	B	6.0 (152.4 mm)	C	B
209*	BH	6.0 (152.4 mm)	C	E
210*	S	6.0 (152.4 mm)	C	B
211*	B	6.0 (152.4 mm)	A	C
212*	BH	6.0 (152.4 mm)	A	F
213*	S	6.0 (152.4 mm)	A	C
214*	B	6.0 (152.4 mm)	B	C
215*	BH	6.0 (152.4 mm)	B	F
216*	S	6.0 (152.4 mm)	B	C

1/ "****" represents the finish and shall be replaced by "C" or "N" (NOTE: If passivated stainless steel material is used, no suffix code is required).

**DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO**

SIZE

A

**CAGE CODE
14933**

REV H

**DWG NO.
85020**

PAGE 11

4. VERIFICATION

4.1 Conformance inspections.

4.1.1 Inspection of product for delivery. Inspection of product for delivery shall consist of visual and mechanical inspections of interface and physical dimensions (see 3.1), materials (see 3.2), and workmanship (see 3.8). Criteria for defects are listed in 4.1.5.

4.1.2 Optional statement of compliance. The acquiring activity, at its discretion, may accept a statement of compliance in lieu of the manufacturer performing the inspection of product for delivery (see 6.2.b).

4.1.3 Sampling plan. A sample of parts shall be randomly selected in accordance with table II, normal sampling. If one or more defects are found, the lot shall be rejected. Criteria for defects are listed in 4.1.5.

4.1.4 Rejected lots. If an inspection lot is rejected after normal sampling inspection, the manufacturer may rework it to correct the defects, or screen out the defective parts and resubmit for inspection. Resubmitted lots shall be inspected by selecting a random sample of parts in accordance with table II, tightened sampling. If one or more defects are found in this sample, the lot shall be rejected and shall not be supplied to this specification. Resubmitted lots which are acceptable shall be clearly identified as reinspected lots.

4.1.5 Defective characteristics and properties. Dimensional characteristics are considered defective when out of tolerance. Physical and functional properties are considered defective when outside the specified minimum, maximum, or range as applicable. Workmanship characteristics are considered defective when they would be detrimental to the intended use, performance requirements, or environmental survival of the part.

TABLE II. Sampling plan.

Lot size	Normal	Tightened
2 to 25	3	5
26 to 50	5	6
51 to 90	6	7
91 to 150	7	11
151 to 280	10	13
281 to 500	11	16
501 to 1,200	15	19
1,201 to 3,200	18	23
3,201 to 10,000	22	29
10,001 and over	29	35

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's system command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

**DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO**

SIZE

A

**CAGE CODE
14933**

REV H

**DWG NO.
85020**

PAGE 12

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. Devices conforming to this drawing are intended for use when performance specifications do not exist and qualified performance devices that will perform the required function are not available for OEM application. This drawing is intended exclusively to prevent the proliferation of duplicate specifications, drawings, and stock number listings.

6.1.1 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs. The Environmental Protection Agency (EPA) has identified seventeen hazardous materials targeted for major usage reduction. If any of these hazardous materials are required, it is recommended that it be used only when other materials cannot meet performance requirements.

6.1.2 Guidance on use of alternative parts with less hazardous or nonhazardous materials. This drawing provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit and function requirements of their application.

6.1.3 Replaceability. Devices covered by this drawing will replace the commercial device covered by a contractor-prepared specification or drawing.

6.2 Acquisition requirements. The acquisition requirements should specify the following:

- a. Complete PIN (see 1.2).
- b. Requirements for delivery of one copy of the conformance inspection data or certificate of compliance that parts have passed conformance inspection with each shipment of parts by the manufacturer.
- c. Whether the manufacturer performs the product for delivery inspection (4.1.1) or provides an optional statement of compliance (4.1.2).
- d. Requirements for notification of change in product to the contracting activity, if applicable.
- e. Requirements for packaging, if other than standard commercial packaging is desired.

6.3 Users of record. Coordination of this document for future revisions are coordinated only with the suggested sources of supply and the users of record of this document. Requests to be added as a recorded user of this drawing should be in writing to: DLA Land and Maritime VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at "5998.Documents@dla.mil".

6.4 Superseded PINs. This drawing includes the essential requirements of previous revisions and supersedes previous PIN designations (see 1.2). The original version of this drawing covered only cadmium plated parts, which were represented by part numbers without suffix letters. Part numbers in subsequent revisions included suffix letters to denote optional finishes. (NOTE: If passivated stainless steel material is used, no suffix code is required).

Superseded DESC drawing PIN in accordance with DD 85020B dated 31 August 1987 (1)	Superseding DESC drawing PIN per 85020A dated 24 October 1985 (1)
86092-XXXC	85020-XXX

6.5 Approved sources of supply. Approved sources of supply are listed herein. Additional sources will be added as they become available. The vendors listed herein have agreed with this drawing and have submitted a certificate of compliance (see 3.6 herein) to DLA Land and Maritime – VAC.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 13

DESC drawing PIN 85020- (1)	Vendor similar designation or type number (2)	DESC drawing PIN 85020- (1)	Vendor similar designation or type number (2)	Vendor CAGE	Vendor name and address
001*	35-1543B-1043	049*	35-1543B-1063	61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121-3410 Tele: (858) 740-2400 FAX: (858) 740-2430 E-mail: askschroff@nVent.com URL: https://schroff.nvent.com
002*	35C-1543BH-1043	050*	35C-1543BH-1063		
003*	35-1543CR-104	051*	35-1543CR-106		
004*	35-1543B-2043	052*	35-1543B-2063		
005*	35C-1543BH-2043	053*	35C-1543BH-2063		
006*	35-1543CR-204	054*	35-1543CR-206		
007*	35-1543B-3043	055*	35-1543B-3063		
008*	35C-1543BH-3043	056*	35C-1543BH-3063		
009*	35-1543CR-304	057*	35-1543CR-306		
010*	35-1544B-1043	058*	35-1544B-1063		
011*	35C-1544BH-1043	059*	35C-1544BH-1063		
012*	35-1544CR-104	060*	35-1544CR-106		
013*	35-1544B-2043	061*	35-1544B-2063		
014*	35C-1544BH-2043	062*	35C-1544BH-2063		
015*	35-1544CR-204	063*	35-1544CR-206		
016*	35-1544B-3043	064*	35-1544B-3063		
017*	35C-1544BH-3043	065*	35C-1544BH-3063		
018*	35-1544CR-304	066*	35-1544CR-306		
019*	35-1545B-1043	067*	35-1545B-1063		
020*	35C-1545BH-1043	068*	35C-1545BH-1063		
021*	35-1545CR-104	069*	35-1545CR-106		
022*	35-1545B-2043	070*	35-1545B-2063		
023*	35C-1545BH-2043	071*	35C-1545BH-2063		
024*	35-1545CR-204	072*	35-1545CR-206		
025*	35-1543B-1053	073*	35-1543B-1073		
026*	35C-1543BH-1053	074*	35C-1543BH-1073		
027*	35-1543CR-105	075*	35-1543CR-107		
028*	35-1543B-2053	076*	35-1543B-2073		
029*	35C-1543BH-2053	077*	35C-1543BH-2073		
030*	35-1543CR-205	078*	35-1543CR-207		
031*	35-1543B-3053	079*	35-1543B-3073		
032*	35C-1543BH-3053	080*	35C-1543BH-3073		
033*	35-1543CR-305	081*	35-1543CR-307		
034*	35-1544B-1053	082*	35-1544B-1073		
035*	35C-1544BH-1053	083*	35C-1544BH-1073		
036*	35-1544CR-105	084*	35-1544CR-107		
037*	35-1544B-2053	085*	35-1544B-2073		
038*	35C-1544BH-2053	086*	35C-1544BH-2073		
039*	35-1544CR-205	087*	35-1544CR-207		
040*	35-1544B-3053	088*	35-1544B-3073		
041*	35C-1544BH-3053	089*	35C-1544BH-3073		
042*	35-1544CR-305	090*	35-1544CR-307		
043*	35-1545B-1053	091*	35-1545B-1073		
044*	35C-1545BH-1053	092*	35C-1545BH-1073		
045*	35-1545CR-105	093*	35-1545CR-107		
046*	35-1545B-2053	094*	35-1545B-2073		
047*	35C-1545BH-2053	095*	35C-1545BH-2073		
048*	35-1545CR-205	096*	35-1545CR-207		

See notes at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 14

DESC drawing PIN 85020- (1)	Vendor similar designation or type number (2)	DESC drawing PIN 85020- (1)	Vendor similar designation or type number (2)	Vendor CAGE	Vendor name and address
097*	35-1543B-1083	145*	35-1543B-1103	61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121-3410 Tele: (858) 740-2400 FAX: (858) 740-2430 E-mail: askschroff@nVent.com URL: https://schroff.nvent.com
098*	35C-1543BH-1083	146*	35C-1543BH-1103		
099*	35-1543CR-108	147*	35-1543CR-110		
100*	35-1543B-2083	148*	35-1543B-2103		
101*	35C-1543BH-2083	149*	35C-1543BH-2103		
102*	35-1543CR-208	150*	35-1543CR-210		
103*	35-1543B-3083	151*	35-1543B-3103		
104*	35C-1543BH-3083	152*	35C-1543BH-3103		
105*	35-1543CR-308	153*	35-1543CR-310		
106*	35-1544B-1083	154*	35-1544B-1103		
107*	35C-1544BH-1083	155*	35C-1544BH-1103		
108*	35-1544CR-108	156*	35-1544CR-110		
109*	35-1544B-2083	157*	35-1544B-2103		
110*	35C-1544BH-2083	158*	35C-1544BH-2103		
111*	35-1544CR-208	159*	35-1544CR-210		
112*	35-1544B-3083	160*	35-1544B-3103		
113*	35C-1544BH-3083	161*	35C-1544BH-3103		
114*	35-1544CR-308	162*	35-1544CR-310		
115*	35-1545B-1083	163*	35-1545B-1103		
116*	35C-1545BH-1083	164*	35C-1545BH-1103		
117*	35-1545CR-108	165*	35-1545CR-110		
118*	35-1545B-2083	166*	35-1545B-2103		
119*	35C-1545BH-2083	167*	35C-1545BH-2103		
120*	35-1545CR-208	168*	35-1545CR-210		
121*	35-1543B-1093	169*	35-1543B-1113		
122*	35C-1543BH-1093	170*	35C-1543BH-1113		
123*	35-1543CR-109	171*	35-1543CR-111		
124*	35-1543B-2093	172*	35-1543B-2113		
125*	35C-1543BH-2093	173*	35C-1543BH-2113		
126*	35-1543CR-209	174*	35-1543CR-211		
127*	35-1543B-3093	175*	35-1543B-3113		
128*	35C-1543BH-3093	176*	35C-1543BH-3113		
129*	35-1543CR-309	177*	35-1543CR-311		
130*	35-1544B-1093	178*	35-1544B-1113		
131*	35C-1544BH-1093	179*	35C-1544BH-1113		
132*	35-1544CR-109	180*	35-1544CR-111		
133*	35-1544B-2093	181*	35-1544B-2113		
134*	35C-1544BH-2093	182*	35C-1544BH-2113		
135*	35-1544CR-209	183*	35-1544CR-211		
136*	35-1544B-3093	184*	35-1544B-3113		
137*	35C-1544BH-3093	185*	35C-1544BH-3113		
138*	35-1544CR-309	186*	35-1544CR-311		
139*	35-1545B-1093	187*	35-1545B-1113		
140*	35C-1545BH-1093	188*	35C-1545BH-1113		
141*	35-1545CR-109	189*	35-1545CR-111		
142*	35-1545B-2093	190*	35-1545B-2113		
143*	35C-1545BH-2093	191*	35C-1545BH-2113		
144*	35-1545CR-209	192*	35-1545CR-211		

See notes at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 15

DESC drawing PIN 85020- (1)	Vendor similar designation or type number (2)	DESC drawing PIN 85020- (1)	Vendor similar designation or type number (2)	Vendor CAGE	Vendor name and address
193*	35-1543B-1123	205*	35-1544B-2123	61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121-3410 Tele: (858) 740-2400 FAX: (858) 740-2430 E-mail: askschroff@nVent.com URL: https://schroff.nvent.com
194*	35C-1543BH-1123	206*	35C-1544BH-2123		
195*	35-1543CR-112	207*	35-1544CR-212		
196*	35-1543B-2123	208*	35-1544B-3123		
197*	35C-1543BH-2123	209*	35C-1544BH-3123		
198*	35-1543CR-212	210*	35-1545CR-312		
199*	35-1543B-3123	211*	35-1545B-1123		
200*	35C-1543BH-3123	212*	35C-1545BH-1123		
201*	35-1543CR-312	213*	35-1545CR-112		
202*	35-1544B-1123	214*	35-1545B-2123		
203*	35C-1544BH-1123	215*	35C-1545BH-2123		
204*	35-1544CR-112	216*	35-1545CR-212		

- (1) Parts must be purchased to this DESC PIN to assure that all performance requirements and tests are met.
(2) Do not use vendor PIN's for acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

6.6 Supersession data. Superseded part numbers are listed below.

Superseding (new) <u>part number (1)</u>	Superseded (old) <u>part number (2)</u>
AA55563/02AA20@	85020-001*
AA55563/08BA20@	85020-002*
AA55563/02DA20G (3)	85020-003*
AA55563/02AB20@	85020-004*
AA55563/08BB20@	85020-005*
AA55563/02DB20G (3)	85020-006*
AA55563/02AC20@	85020-007*
AA55563/08BC20@	85020-008*
AA55563/02DC20G (3)	85020-009*
AA55563/04AA20@	85020-010*
AA55563/10BA20@	85020-011*
AA55563/04DA20G (3)	85020-012*
AA55563/04AB20@	85020-013*
AA55563/10BB20@	85020-014*
AA55563/04DB20G (3)	85020-015*
AA55563/04AC20@	85020-016*
AA55563/10BC20@	85020-017*
AA55563/04DC20G (3)	85020-018*
AA55563/06AA20@	85020-019*
AA55563/12BA20@	85020-020*
AA55563/06DA20G (3)	85020-021*
AA55563/06AB20@	85020-022*
AA55563/12BB20@	85020-023*
AA55563/06DB20G (3)	85020-024*

See notes at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 16

Superseding (new) part number (1)	Superseded (old) part number (2)
AA55563/02AA25@	85020-025*
AA55563/08BA25@	85020-026*
AA55563/02DA25G (3)	85020-027*
AA55563/02AB25@	85020-028*
AA55563/08BB25@	85020-029*
AA55563/02DB25G (3)	85020-030*
AA55563/02AC25@	85020-031*
AA55563/08BC25@	85020-032*
AA55563/02DC25G (3)	85020-033*
AA55563/04AA25@	85020-034*
AA55563/10BA25@	85020-035*
AA55563/04DA25G (3)	85020-036*
AA55563/04AB25@	85020-037*
AA55563/10BB25@	85020-038*
AA55563/04DB25G (3)	85020-039*
AA55563/04AC25@	85020-040*
AA55563/10BC25@	85020-041*
AA55563/04DC25G (3)	85020-042*
AA55563/06AA25@	85020-043*
AA55563/12BA25@	85020-044*
AA55563/06DA25G (3)	85020-045*
AA55563/06AB25@	85020-046*
AA55563/12BB25@	85020-047*
AA55563/06DB25G (3)	85020-048*
AA55563/02AA30@	85020-049*
AA55563/08BA30@	85020-050*
AA55563/02DA30G (3)	85020-051*
AA55563/02AB30@	85020-052*
AA55563/08BB30@	85020-053*
AA55563/02DB30G (3)	85020-054*
AA55563/02AC30@	85020-055*
AA55563/08BC30@	85020-056*
AA55563/02DC30G (3)	85020-057*
AA55563/04AA30@	85020-058*
AA55563/10BA30@	85020-059*
AA55563/04DA30G (3)	85020-060*
AA55563/04AB30@	85020-061*
AA55563/10BB30@	85020-062*
AA55563/04DB30G (3)	85020-063*
AA55563/04AC30@	85020-064*
AA55563/10BC30@	85020-065*
AA55563/04DC30G (3)	85020-066*

See notes at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 17

Superseding (new) <u>part number (1)</u>	Superseded (old) <u>part number (2)</u>
AA55563/06AA30@	85020-067*
AA55563/12BA30@	85020-068*
AA55563/06DA30G (3)	85020-069*
AA55563/06AB30@	85020-070*
AA55563/12BB30@	85020-071*
AA55563/06DB30G (3)	85020-072*
AA55563/02AA35@	85020-073*
AA55563/08BA35@	85020-074*
AA55563/02DA35G (3)	85020-075*
AA55563/02AB35@	85020-076*
AA55563/08BB35@	85020-077*
AA55563/02DB35G (3)	85020-078*
AA55563/02AC35@	85020-079*
AA55563/08BC35@	85020-080*
AA55563/02DC35G (3)	85020-081*
AA55563/04AA35@	85020-082*
AA55563/10BA35@	85020-083
AA55563/04DA35G (3)	85020-084*
AA55563/04AB35@	85020-085*
AA55563/10BB35@	85020-086*
AA55563/04DB35G (3)	85020-087*
AA55563/04AC35@	85020-088*
AA55563/10BC35@	85020-089*
AA55563/04DC35G (3)	85020-090*
AA55563/06AA35@	85020-091*
AA55563/12BA35@	85020-092*
AA55563/06DA35G (3)	85020-093*
AA55563/06AB35@	85020-094*
AA55563/12BB35@	85020-095*
AA55563/06DB35G (3)	85020-096*
AA55563/02AA40@	85020-097*
AA55563/08BA40@	85020-098*
AA55563/02DA40G (3)	85020-099*
AA55563/02AB40@	85020-100*
AA55563/08BB40@	85020-101*
AA55563/02DB40G (3)	85020-102*
AA55563/02AC40@	85020-103*
AA55563/08BC40@	85020-104*
AA55563/02DC40G (3)	85020-105*
AA55563/04AA40@	85020-106*
AA55563/10BA40@	85020-107*
AA55563/04DA40G (3)	85020-108*

See notes at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 18

Superseding (new) <u>part number (1)</u>	Superseded (old) <u>part number (2)</u>
AA55563/04AB40@	85020-109*
AA55563/10BB40@	85020-110*
AA55563/04DB40G (3)	85020-111*
AA55563/04AC40@	85020-112*
AA55563/10BC40@	85020-113*
AA55563/04DC40G (3)	85020-114*
AA55563/06AA40@	85020-115*
AA55563/12BA40@	85020-116*
AA55563/06DA40G (3)	85020-117*
AA55563/06AB40@	85020-118*
AA55563/12BB40@	85020-119*
AA55563/06DB40G (3)	85020-120*
AA55563/02AA45@	85020-121*
AA55563/08BA45@	85020-122*
AA55563/02DA45G (3)	85020-123*
AA55563/02AB45@	85020-124*
AA55563/08BB45@	85020-125*
AA55563/02DB45G (3)	85020-126*
AA55563/02AC45@	85020-127*
AA55563/08BC45@	85020-128*
AA55563/02DC45G (3)	85020-129*
AA55563/04AA45@	85020-130*
AA55563/10BA45@	85020-131*
AA55563/04DA45G (3)	85020-132*
AA55563/04AB45@	85020-133*
AA55563/10BB45@	85020-134*
AA55563/04DB45G (3)	85020-135*
AA55563/04AC45@	85020-136*
AA55563/10BC45@	85020-137*
AA55563/04DC45G (3)	85020-138*
AA55563/06AA45@	85020-139*
AA55563/12BA45@	85020-140*
AA55563/06DA45G (3)	85020-141*
AA55563/06AB45@	85020-142*
AA55563/12BB45@	85020-143*
AA55563/06DB45G (3)	85020-144*
AA55563/02AA50@	85020-145*
AA55563/08BA50@	85020-146*
AA55563/02DA50G (3)	85020-147*
AA55563/02AB50@	85020-148*
AA55563/08BB50@	85020-149*
AA55563/02DB50G (3)	85020-150*

See notes at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 19

<u>Superseding (new) part number (1)</u>	<u>Superseded (old) part number (2)</u>
AA55563/02AC50@	85020-151*
AA55563/08BC50@	85020-152*
AA55563/02DC50G (3)	85020-153*
AA55563/04AA50@	85020-154*
AA55563/10BA50@	85020-155*
AA55563/04DA50G (3)	85020-156*
AA55563/04AB50@	85020-157*
AA55563/10BB50@	85020-158*
AA55563/04DB50G (3)	85020-159*
AA55563/04AC50@	85020-160*
AA55563/10BC50@	85020-161*
AA55563/04DC50G (3)	85020-162*
AA55563/06AA50@	85020-163*
AA55563/12BA50@	85020-164*
AA55563/06DA50G (3)	85020-165*
AA55563/06AB50@	85020-166*
AA55563/12BB50@	85020-167*
AA55563/06DB50G (3)	85020-168*
AA55563/02AA55@	85020-169*
AA55563/08BA55@	85020-170*
AA55563/02DA55G (3)	85020-171*
AA55563/02AB55@	85020-172*
AA55563/08BB55@	85020-173*
AA55563/02DB55G (3)	85020-174*
AA55563/02AC55@	85020-175*
AA55563/08BC55@	85020-176*
AA55563/02DC55G (3)	85020-177*
AA55563/04AA55@	85020-178*
AA55563/10BA55@	85020-179*
AA55563/04DA55G (3)	85020-180*
AA55563/04AB55@	85020-181*
AA55563/10BB55@	85020-182*
AA55563/04DB55G (3)	85020-183*
AA55563/04AC55@	85020-184*
AA55563/10BC55@	85020-185*
AA55563/04DC55G (3)	85020-186*
AA55563/06AA55@	85020-187*
AA55563/12BA55@	85020-188*
AA55563/06DA55G (3)	85020-189*
AA55563/06AB55@	85020-190*
AA55563/12BB55@	85020-191*
AA55563/06DB55G (3)	85020-192*

See notes at end of table.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE	CAGE CODE 14933	DWG NO. 85020
	A	REV H	PAGE 20

Superseding (new) part number (1)	Superseded (old) part number (2)
AA55563/02AA60@	85020-193*
AA55563/08BA60@	85020-194*
AA55563/02DA60G (3)	85020-195*
AA55563/02AB60@	85020-196*
AA55563/08BB60@	85020-197*
AA55563/02DB60G (3)	85020-198*
AA55563/02AC60@	85020-199*
AA55563/08BC60@	85020-200*
AA55563/02DC60G (3)	85020-201*
AA55563/04AA60@	85020-202*
AA55563/10BA60@	85020-203*
AA55563/04DA60G (3)	85020-204*
AA55563/04AB60@	85020-205*
AA55563/10BB60@	85020-206*
AA55563/04DB60G (3)	85020-207*
AA55563/04AC60@	85020-208*
AA55563/10BC60@	85020-209*
AA55563/04DC60G (3)	85020-210*
AA55563/06AA60@	85020-211*
AA55563/12BA60@	85020-212*
AA55563/06DA60G (3)	85020-213*
AA55563/06AB60@	85020-214*
AA55563/12BB60@	85020-215*
AA55563/06DB60G (3)	85020-216*

- (1) The "@" in the superseding part number represents the finish and shall be replaced by "A" or "F".
- (2) The "***" in the superseding part number represents the finish and shall be replaced by "C" or "N". Card holders made of passivated stainless steel require no suffix code.
- (3) When stainless steel is used, only finish code "G" is available (15th character position of superseding part number).

6.7 Users of record. Coordination of this document for future revisions is coordinated only with the approved sources of supply and the users of record of this document. Requests to be added as a recorded user of this drawing may be achieved online at 5998.Documents@dla.mil or if in writing to: DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990.

**DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO**

SIZE

A

**CAGE CODE
14933**

REV H

**DWG NO.
85020**

PAGE 21