

REVISIONS			
LT	DESCRIPTION	DATE	APPROVED
A	Page 2: Add reference to MIL-STD-202. Page 3: Paragraph 3.4.4, delete "surge current" and substitute "overload". Page 6: Delete figures 4 and 5 and substitute new figure 4.	7 Mar 1986	Randy Larson
B	Add a printed circuit terminal configuration. Change manufacturer's eligibility.	24 Aug 1987	Randy Larson
C	Change selected input characteristic parameters.	5 Jun 1990	Randy Larson
D	Cancel Document	3 Mar 2000	Kendall A. Cottongim

Notice of Cancellation

DESC Drawing 85090, dated 27 August 1985 is hereby canceled. No superseding document.

Prepared in accordance with MIL-STD-100

Selected item drawing

REV																						
PAGE																						
REV																						
PAGE																						
REV STATUS OF PAGES	REV		D																			
	PAGES		1	2	3	4	5	6	7	8	9											

PMIC N/A	PREPARED BY Bud Boulter		DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OH	
Original date of drawing 27 August 1985	CHECKED BY Bud Boulter		TITLE RELAYS, SOLID STATE, TRANSFORMER ISOLATED, 5 AMPERE LOAD AT 250 V DC. DC INPUT CONTROL	
	APPROVED BY Randy Larson			
	SIZE A	CODE IDENT. NO. 14933	DWG NO. 85090	
	REV D		PAGE 1 OF 9	

1.1 Scope. This drawing establishes the complete requirements for a sealed solid state relay supplied to "Y" screening requirements of MIL-R-28750.

85090		-001
Drawing number		Dash number { see figures 2 and 3 }

2.1 Government specification and standard. Unless otherwise specified, the following specification and standard, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

MIL-R-28750 - Relays, Solid State, General Specification for.

MIL-STD-202 - Test Methods For Electronic and Electrical Component Parts.

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

3.1 Item requirements. The individual item requirements shall be in accordance with MIL-R-28750, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-R-28750, and herein (see figures 2 and 3).

3.3 Input characteristics. (see figure 1).

CAUTION: Do not ramp input. Maximum allowable rise time and fall time of control signal is 10 μ s for timing measurements and 100 μ s for all other operations.

3.3.1 Control voltage range.

DC input (-001 or -003): 4 V dc minimum to 10 V dc maximum.

DC input (-002 or -004): 10 V dc minimum to 32 V dc maximum.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE A	CODE IDENT. NO. 14933	DWG NO. 85090
		REV C	PAGE 2

3.3.2 Turn on voltage.

(-001 or -003): 4 V dc minimum.

(-002 or -004): 10 V dc minimum.

3.3.3 Turn off voltage: 0.4 V dc maximum.

3.3.4 Input current (see figure 4):

DC input (-001 or -003) at 5 V dc. 15 mA maximum.

DC input (-002 or -004) at 28 V dc. 30 mA maximum.

3.3.5 Turn-on time delay. 40 microseconds maximum.

3.3.6 Turn-off time delay. 100 microseconds maximum.

3.3.7 Rise time. 80 microseconds maximum.

3.3.8 Fall time. 50 microseconds maximum.

3.4 Output characteristics.

3.4.1 Output current rating (resistive load). 5 amperes (see figures 4 and 5).

3.4.2 Load voltage rating. 3 to 250 V dc.

3.4.3 Voltage drop at maximum current. 2.0 V dc maximum.

3.4.4 Overload. As specified in MIL-R-28750 except maximum current shall be 10 amperes.

3.4.5 Output leakage current. 0.1 mA dc maximum at 250 V (100°C maximum).

3.5 Electrical characteristics.

3.5.1 <u>Isolation.</u>	Input to output	} 1,000 megohms minimum.
	Input to case	
	Output to case	

3.5.2 Capacitance. Input to output - 15 picofarads maximum.

3.5.3 <u>Dielectric strength.</u>	Input to output	} 1,500 V rms minimum.
	Input to case	
	Output to case	

3.5.4 Power dissipation factor. 2.0 watts per ampere maximum.

3.5.5 Power junction temperature. +175°C maximum.

3.5.6 Reverse polarity. Not applicable.

3.5.7 Transient voltage. Not applicable.

3.5.8 Electromagnetic interference. Not applicable.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE

A

CODE IDENT. NO.

14933



DWG NO.

85090

REV C

PAGE 3

TURN ON
VOLTAGE MIN
TURN OFF
VOLTAGE MAX

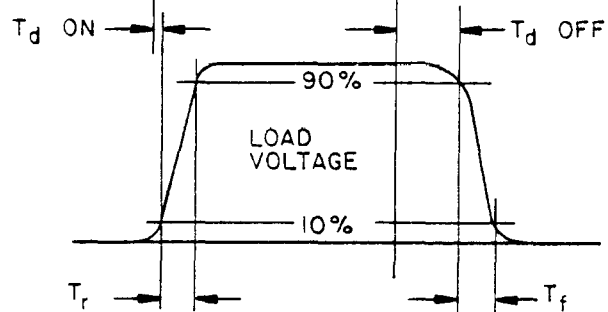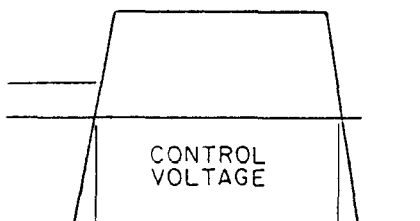

NOTE: Relay mounted with silicone grease on heat sink.

FIGURE 1. Response curves.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE
A

CODE IDENT. NO.
14933



DWG NO.

85090

REV

PAGE

4

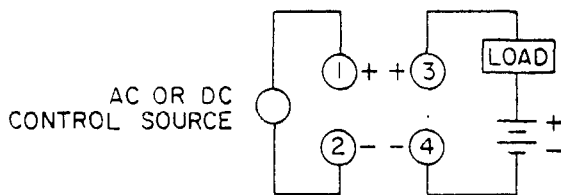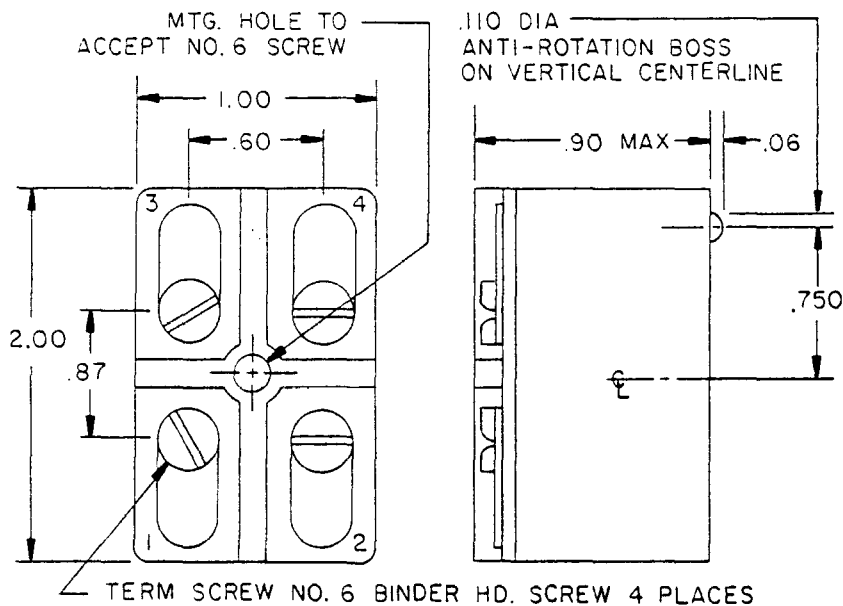

CIRCUIT DIAGRAM TERMINAL VIEW




Inches	mm
.06	1.5
.110	2.79
.60	15.2
.750	19.05
.87	22.1
.90	22.9
1.00	25.4
2.00	50.8

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.005 (0.13 mm) for three place decimals and ± 0.01 (0.3 mm) for two place decimals.
4. Circuit diagram shown on part is terminal view.

FIGURE 2. Outline dimensions and configuration (-001 and -002).

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE A	CODE IDENT. NO. 14933	DWG NO. 85090
		REV 8	PAGE 5

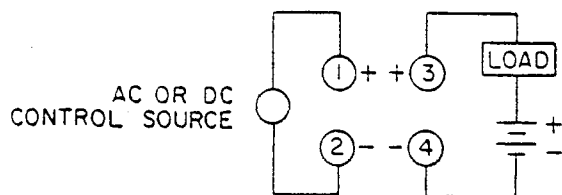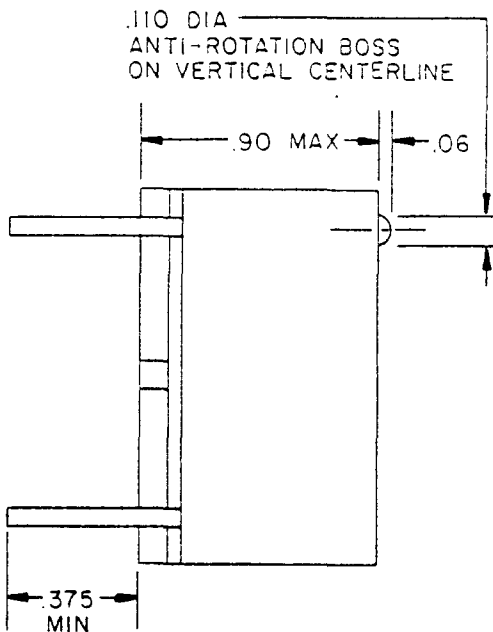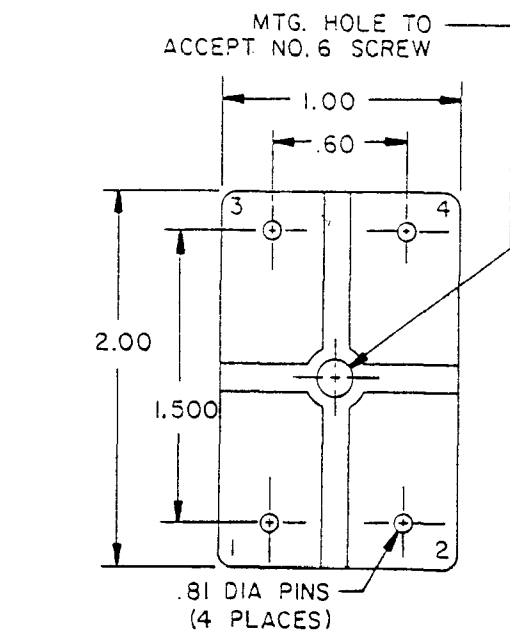

CIRCUIT DIAGRAM TERMINAL VIEW

Inches	mm
.06	1.5
.110	2.79
.375	9.53
.60	15.2
.81	20.6
.90	22.9
1.00	25.4
1.500	38.10
2.00	50.8

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.005 (0.13 mm) for three place decimals and ± 0.01 (0.3 mm) for two place decimals.
4. Circuit diagram shown on part is terminal view.

FIGURE 3. Outline dimensions and configuration (-003 and -004).

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE
A

CODE IDENT. NO.
14933

DWG NO.
85090

REV 8

PAGE 6

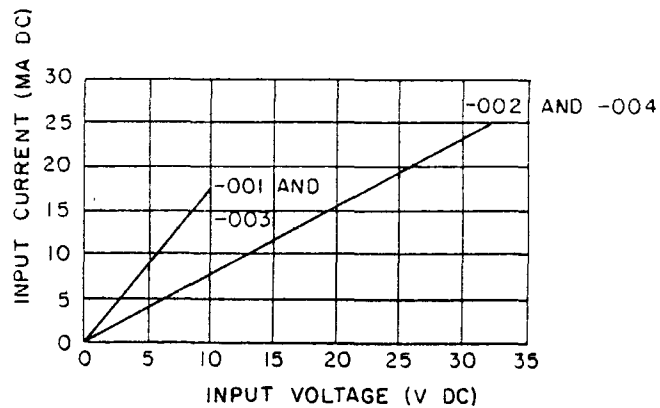


FIGURE 4. Input current vs input voltage.

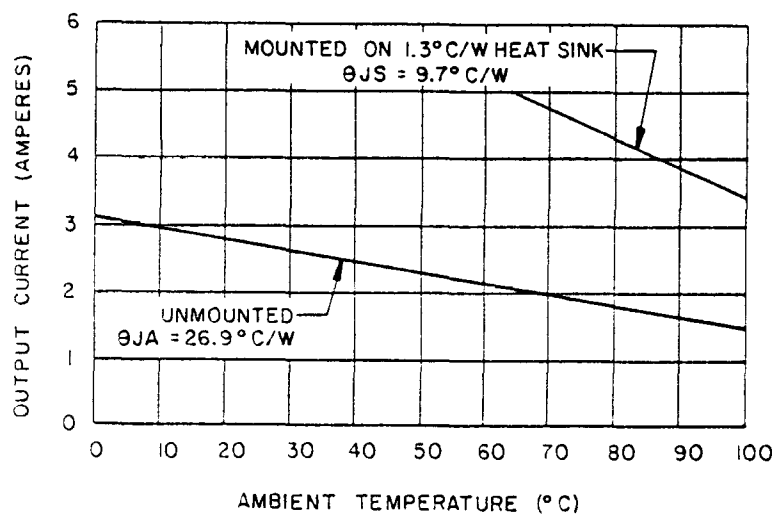


FIGURE 5. Output current vs ambient temperature.

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO

SIZE
A

CODE IDENT. NO.
14933

DWG NO.

85090

REV B

PAGE 7

3.5.9 Exponential rate of voltage rise. Not applicable.

3.6 Environmental data.

3.6.1 Operating temperature range. -20°C to +100°C.

3.6.2 Storage temperature range. -30°C to +100°C.

3.6.3 Shock. MIL-STD-202, method 213, test condition G (50 g's).

3.6.4 Vibration. MIL-STD-202, method 204, test condition D (20 g's, 10 to 2,000 Hz).

3.7 Physical. Physical requirements shall be as specified herein.

3.7.1 Weight. 85 grams (3 ounces) maximum.

3.7.2 Dimensions and configuration: See figures 2 and 3.

3.8 Marking. Marking shall be in accordance with MIL-R-28750 except the part number shall be in accordance with 1.2 herein. The "M28750/X-XXXY" part number shall not be used.

3.9 Quality assurance requirements. Relays furnished under this drawing shall have been subjected to, and passed all the requirements, tests, and inspections detailed herein.

3.9.1 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-R-28750 and 4.3 herein.

3.10 Certification as an approved source of supply. In order to be listed as an approved source of supply for relays manufactured to this drawing, a manufacturer shall:

- a. Agree to make available to DESC, upon request, all pertinent test data on its production of the subject part, including, but not limited to, test data in accordance with the qualification inspection table of MIL-R-28750, Y screening level; and
- b. Provide to DESC-EMM or its designated agent, upon request, free of charge and without obligation, a current production sample from its production of the subject part; and
- c. Meet one of the following criteria:
 - (1) Currently possess listing on qualified products list QPL-28750 for at least one part; or
 - (2) Be in current production of the subject part.

3.11 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply (see 6.6 and 6.7).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-28750, except as modified herein.

4.2 Quality conformance inspection. Quality conformance inspection shall be in accordance with group A listing of MIL-R-28750. Group A testing shall be performed on each inspection lot and manufacturers shall keep lot records for 3 years (minimum), monitor for compliance to the prescribed procedures, and observe that satisfactory manufacturing conditions and records on lots are maintained for these relays.

4.2.1 Group A inspection. Group A inspection shall consist of all tests specified in MIL-R-28750 for the "Y" screening level except internal components used internally to the relay shall not require hermetic packaging. Temperature range shall be as specified in 3.6.1.

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE A	CODE IDENT. NO. 14933	DWG NO. 85090
		REV C	PAGE 8

4.2.1.1 Seal. Hermetic seal testing is not applicable.

4.3 Inspection of packaging. Inspection of packaging shall be in accordance with MIL-R-28750.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-28750.

6. NOTES

6.1 Notes. Only definitions of the notes specified in MIL-R-28750 shall apply to this drawing.

6.2 Intended use. Relays conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. This drawing is intended exclusively to prevent the proliferation of unnecessary duplicate specifications, drawings, and stock catalog listings. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-28750, this drawing will become inactive for new design. The QPL-28750 product shall be the preferred item for all applications.

6.3 Ordering data. The acquisition document should specify the following:

- a. Complete part number (see 1.2).
- b. One copy of the quality conformance inspection data as required in 4.2 to be shipped with each lot.
- c. Requirements for packaging and packing.

6.4 Replaceability. Relays covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.5 Comments. Comments on this drawing should be directed to DESC-EMM, Dayton, Ohio 45444, or telephone 513-296-6184.

6.6 Submission of certificate of compliance. The certificate of compliance submitted to DESC-EMM, prior to listing as an approved source, shall state the manufacturer's product meets the requirements herein.

6.7 Approved source of supply. An approved source of supply is listed herein. Additional sources will be added as they become available. The vendor listed herein has agreed to this drawing and a certificate of compliance (see 3.11) has been submitted to DESC-EMM.

DESC drawing part number 85090-	Vendor CAGE number	Vendor similar part number
001	63745	M03-3
002	63745	M03-4
003	63745	M03-3P
004	63745	M03-4P

Vendor CAGE
number

63745

Vendor name
and address

Teledyne Solid State Products
12525 Daphne Avenue
Hawthorne, CA 90250

DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO	SIZE A	CODE IDENT. NO. 14933	DWG NO. 85090
		REV C	PAGE 9